



ANDREWS SYKES

PRODUCT GUIDE



 **ANDREWS**
AIR CONDITIONING

 **ANDREWS**
HEAT FOR HIRE

 **ANDREWS**
CHILLERS

 **ANDREWS**
BOILERS

 **ANDREWS**
DEHUMIDIFICATION

 **ANDREWS**
VENTILATION

 **ANDREWS**
AIR QUALITY

**THE UK'S LEADING HVAC SPECIALIST
HIRE COMPANY**

HIRE SALES SERVICE INSTALL

0800 211 611

andrews-sykes.com

ANDREWS SYKES HIRE	4
AIR CONDITIONING AND REFRIGERATION	8
● Exhaust Tube	15
● Split Type	25
● High Performance	31
● Evaporative Coolers	34
CHILLERS	38
● Fluid Chillers	38
● Fast Chillers	44
● Air Handlers	62
HEATING	74
● Electric Heaters	80
● Indirect Fired Oil Heaters	92
● Indirect Fired Gas Heaters	98
● Direct Fired Oil Heaters	100
● Direct Fired Gas Heaters	102
● Accessories	105
BOILERS	112
● Electric Boilers	116
● Packaged Boilers	119
● Mobile Boilers	127
● Boiler Accessories	128
DEHUMIDIFICATION	130
● Refrigerant Dehumidifiers	136
● Desiccant Dehumidifiers	141
VENTILATION	146
AIR QUALITY	162
ELECTRICAL DATA / CONVERSIONS	172
DEFINITIONS	176
ANDREWS SYKES GROUP	178
● Pump Hire	178
● Worldwide Operations	179
NOTES	180

Established for over 160 years, Andrews Sykes is the UK's largest specialist hire company. Solutions focused, our industry experienced teams provide 24/7 planned and preventative climate control, via a network of over 25 nationwide locations. Our unique structure enables us to reach any UK destination within four hours and our commitment to delivering the finest equipment, service and expertise is unrivalled within the industry.

As well as our extensive depot network in the UK we have depots throughout Europe and the Middle East, whether through our own depot locations or our carefully selected agents.

Businesses rely on us whether safeguarding against equipment failure, which can have a detrimental impact on people and service, or providing the right conditions to ensure maximum productivity.

From straightforward hire services to full solution provision including design, planning, project management, installation and running of complex temporary and permanent solutions. We can provide an extensive range of air conditioners, chillers, heaters, boilers, dehumidifiers and ventilation equipment to withstand the toughest applications and the most demanding environments.

Our involvement with virtually every market sector allows our engineers to diligently propose solutions to customers operating in any industry, with this expertise reinforced by the fact that there are very few situations that we have not previously encountered.

With an impressive and varied client portfolio, our ability to provide a competitive and engineered solution for every climate control requirement, coupled with bespoke, flexible contract terms to suit, provides ultimate peace of mind and makes us the preferred choice when it comes to business critical equipment hire.

We look forward to working with you.

Regards,



Carl Webb
Managing Director - Andrews Sykes

Andrews Sykes aims to continually improve its performance to meet changing business and regulatory requirements, to minimise the effect of our activities on the environment and to provide products and services that fully and consistently meet the requirements of our customers, both now and in the future.

We are accredited to ISO 9001:2015, ISO 14001:2015 and ISO 45001:2018 and this is confirmed by an annual audit of our systems and processes by an independent accreditation company.

To demonstrate our continued commitment to the environment we also have been audited and certificated for ESOS (Energy Saving Opportunity Scheme) and CEMARS (in accordance with ISO14064-1:2006)

We are also members of the British Safety Council and have CHAS, Construction Line and Safe Contractor accreditations. Our engineers are also F-Gas and Gas Safe trained and we are members of the Hire Association of Europe.

To support our customers and demonstrate to our customers our further commitment to Health & Safety, Quality and the Environment we also hold further industry accreditations such as; Achilles UVDB, Achilles RISQ and Achilles Building Confidence.

As a fleet operator of large vehicles, we also have FORS (Fleet Operator Recognition Scheme) which is an accreditation scheme encompassing all aspects of safety, fuel efficiency, vehicle emissions and improved operations.



We provide the best cooling and heating equipment at the right price, for virtually every need, location and application. This guide should provide all the data you need to choose the right equipment, including detailed technical information. If you have any questions simply call us free on 0800 211 611.

Air conditioning, cooling, chilling and air purification

- Fully portable air conditioners for locations large or small.
- Stylish portable units for “front of house”.
- Mobile fluid chillers and fast chillers - from 6 kW to multi-megawatt packages.
- Low temperature chillers down to -12 OC.
- Air handlers.
- Evaporative coolers.
- Cooling fans.

Heaters, boilers, dryers and ventilation

- Heat for hire - safe, fume-free warmth anywhere.
- Gas and oil indirect and direct-fired heaters.
- Easy to use electric heaters.
- Fully mobile boiler plant and packaged boilers for instant heat and hot water.
- Site heaters.
- Ventilation fans.
- Dehumidifiers and humidifiers.
- Flexible ducting, hoses, accessories and all ancillary equipment.

Our mission is to be Europe's leading climate hire services company, helping our customers to address the real-life challenges they face - whether planned or emergency - in the fastest, most expert, professional and cost effective ways. We want to help our customers control their environment more effectively and pay less.

For our extensive range of products, our commitments are:


- We will have products available 24 hours a day 7 days a week.
- We will understand our customers needs to ensure we provide the most appropriate solution.
- We will employ highly qualified engineers with the necessary training and experience.
- Any products ordered before 12.00 midday on a normal working day will be delivered the same day (if required).
- Free of charge site surveys will be carried out within 24 hours of a request being received.
- Any item that is off hired will be collected within 48 hours of the off hire notice being received.
- Any account queries will be resolved within 14 working days.
- We will respond to any breakdown within 4 hours of being notified.
- All telephone enquiries will be answered within 5 rings of the telephone.

Andrews Sykes are proud to invest in the latest technologies and strive to improve our ever-growing range. We encourage you to visit our website andrews-sykes.com as we regularly add new products and update our technical specifications.

When the temperature rises, it reduces our work performance and equipment failures can occur. To avoid these problems, Andrews offers a wide range of temporary, portable air conditioners based on air and water cooled versions and with or without external air-cooled heat exchangers as well as a wide range of chillers.

The basic principle of air conditioning

An air conditioner is a closed refrigerant system, comprising of an evaporator, a compressor, a condenser and an expansion valve (or capillary), which are all connected to each other with refrigerant piping. Refrigerant gas is circulated within the system in the direction shown in the below drawing.

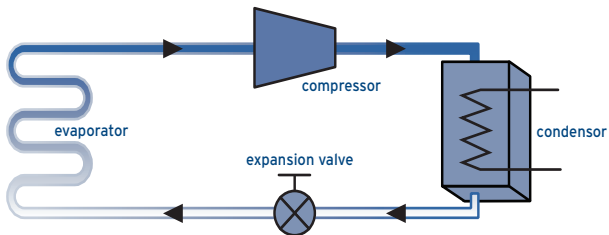

The indoor unit, which is usually installed in the room to be cooled, contains the process where the refrigerant evaporates within the cold element (evaporator). This evaporation is caused because the refrigerant has a very low boiling point of -40°C at atmospheric pressure.

To enable the evaporation, a rise in temperature is necessary. This rise is supplied by the air of the room which is to be cooled and in which the evaporator is situated. As air is passed over the evaporator the air temperature will drop and therefore enable the room air temperature to be reduced.

The compressor draws the vapour refrigerant and reduces the pressure in the evaporator. Because of this pressure reduction the refrigerant evaporates. The vapour which is drawn by the compressor is then compressed. The pressure and temperature of the gas rises as it is compressed into the condenser, where the warm gas is cooled down to the condensation temperature of the refrigerant. Subsequently the vapour returns back to liquid again. In the condenser the process is almost directly opposite to the evaporator. The condenser requires cooling otherwise the temperature and gas pressure will rise too high.


For this cooling process either water or air can be used.

The vapour which has now returned to liquid again is now passed through the expansion valve (or capillary) to the evaporator. Because of the narrowing of the pipe work the pressure decreases and the refrigerant evaporates once more. To enable this evaporation the warm air is needed and so the circuit is closed.




The operation of portable air conditioners: Andrews offer four principle types of portable air conditioners. These are:

1. Exhaust tube units: both the evaporator and condenser are positioned within the room unit. The majority of the air that is passed through the unit is directed over the evaporator and returns back into the room, as cooled air. A smaller volume of air is passed across the condenser to cool the refrigerant gas. This air needs to be removed from the room as it becomes hot. An exhaust tube is used to remove this hot air via an opening in the room (usually through a window). In some cases the exhaust tube may be positioned into a false ceiling void, advice should be sought before using this system.



2. Split type units (refrigerant): These are models similar to the PAC14 QC, such units are supplied in 2 parts, a room unit and a condenser. The room unit placed within the area to be cooled comprises of an evaporator and a compressor. The room air enters the unit and once passed across the evaporator is returned into the room as cooled air. The external unit which is connected to the room unit by a flexible pipe, contains the condenser which needs to be cooled by ambient air, therefore the external unit needs to be positioned outside of the room to be cooled. Typically the condenser is hung from a window.



3. Split type units (water)


These units are the PAC15, PAC22, PAC60 and Zephyr, such units are also supplied in 2 parts, a room unit and a heat exchanger. The principle in operation is very similar to that of the refrigerant units. The major difference is that the condenser is placed within the room unit and cooled by water. The water is then circulated to the external unit (heat exchanger) via flexible pipes before returning to the room unit. The system is totally sealed and requires no further water once the unit is in place. The main advantage of this system is that the connection pipes can be extended - up to 30 metres - allowing the heat exchanger to be positioned away from the room unit.



4. High performance units

In situations where large cooling capacities are required, our high performance air conditioners represent the perfect solution and negate the need for a hire arrangement comprising of several smaller units. Available in 30kW, 45kW and 90kW versions, these units are perfect for reducing the temperatures in large open spaces including film sets, marquees, warehouses and other industrial facilities.

The two larger models also feature technology that allows them to be used in a heating mode, making them dual-purpose units designed for a range of climate control applications. Variable fan settings provide the option for quieter running modes, which is essential in traditional in environments where low background noise is desired.



For the installation of an air conditioner, a number of considerations are important:

1. Ensure that an air-cooled condenser gets enough fresh air (install outside or indoors with sufficient ventilation).
2. Let the evaporator or the indoor unit blow out the cool air freely (ie not against cabinets, beams, fluorescent lights), to ensure a draft-free air distribution.
3. Make sure the evaporator is level, otherwise the drip tray may overflow.
4. Make sure the condensate can be safely discharged.
5. Make sure the distance between the indoor and outdoor unit is not too great (up to 30 metres).
6. Provide adequate voltage.
7. Do NOT over extend exhaust tube.

Applications for temporary air conditioning equipment

- Offices
- Events & Exhibitions
- Temporary accommodation (eg. portable buildings)
- Shops and Restaurants
- Storage of heat-sensitive products (eg. chocolate)
- Computer server rooms
- Spot Cooling
- Schools
- Telecommunication rooms
- Laboratories
- Hospitals
- Production Facilities
- Process control rooms

- Hotel and conference centres
- Printing and reprographics
- Any application where a fixed unit has broken down or needs to be shut down for maintenance.

Calculating the cooling capacity required and choosing the type of air conditioning

The heat load for each room can vary considerably. This depends on the number of lights, the number of people, glass area facing the sun, and the presence of computers and other equipment. It is therefore essential to determine the capacity correctly.

Rule of thumb for an approximation of air conditioning load are:

Normal Modern Offices:	46 W per m ³
Portable Buildings:	57 W per m ³
Tents/Marquees:	95 W per m ³

In addition to the type and size of the area to be cooled consideration must be given to any appliances that generate heat in the area. Such appliances are listed below along with the approximate heat emission that they generate.

Personal Computer	45 W
Printer	35 W
Photocopier Standby	200 W
Photocopier In Use	1,300 W
Coffee Machine	800 W
TV/ Video Screen	50 W
Person	50 W

The Andrews specialists will be glad to work out an accurate cooling calculation for you.

Selection and installation of your portable air conditioner


To select which type of temporary air conditioner you must first consider the capacity of the unit and the possible alternatives to remove the condenser heat.

A room without outside walls or windows often means that a standard PAC (split) unit cannot be used. If an exhaust tube cannot be vented into a ceiling void or out of the room the only alternative may be a water-cooled PAC unit. Again, if it is not possible to position a heat exchanger within 30m of the room unit other alternatives such as a chillier, evaporative coolers or cooling fans may need to be considered.

Before you select your Andrews portable air conditioner we suggest the following issues should be considered.

- The indoor unit (evaporator) needs to be positioned within 1.5 metres of a 13 amp 230 volt socket and located in a manner to avoid any obstruction to the airflow.
- If you are to use a PAC type unit the heat exchanger (condenser) will need to be positioned outside of the building or in a very well ventilated area that can withstand the heat transferred from the room being cooled. Condensation is discharged from the room unit to the heat exchanger where it is allowed to drain to the outside of the building. If the heat exchanger is placed within the building a separate means of discharging the condensation needs to be provided.
- When using a PAC unit it is always advisable to position the heat exchanger away from direct sunlight or any position where its operation is likely to cause disruption. The heat exchanger can only be positioned within the distance specified by PAC line length. Always aim to keep the PAC line length to a minimum.
- Always ensure that the electrical supply to the unit is adequate and that the operation of the unit will not cause any problems to other sensitive electronic equipment.

Videos depicting the installation process for many of our air conditioners can be found online at andrews-sykes.com/air-conditioning/



Nominal cooling duty

Air flow (max)

Typical cooled area

Power supply

Noise level (max)

Weight

Dimensions (L x W x H)

Exhaust duct

Control

Average power consumption

2.2 kW

320 m³/h

53 m³

230 V 1ph 50 Hz Run 3.8 A

53 dBA @ 2 metres

35 kg

450 x 367 x 870 mm

1 metre x 127 mm diameter

Automatic thermostat

650 W/h

Suitable applications include:

Offices

Call centres

Classrooms

Small shops

Hospital rooms

Hotels

Events

Many more

 Plug and play

 Window kits available



Nominal cooling duty

Air flow (max)

Typical cooled area

Power supply

Noise level (max)

Weight

Dimensions (L x W x H)

Exhaust duct

Control

Average power consumption

2.6 kW

300 m³/h

63.7 m³

230 V 1 ph 50 Hz Run 7 A

55 dBA @ 1 metre

35 kg

480 x 380 x 830 mm

2 metres x 127 mm diameter

Remote control with automatic thermostat

1.2 kW/h

Suitable applications include:

Offices

Call centres

Classrooms

Small shops

Hospital rooms

Hotels

Events

Many more

👉 Plug and play

📦 Window kits available



Nominal cooling duty

Air flow (max)

Typical cooled area

Power supply

Noise level

Weight

Dimensions (L x W x H)

Exhaust duct

Control

Average power consumption

2.86 kW

360 m³/h

73 m²

230 V 1 ph 50 Hz Run 5.9A

58 dBA @ 1 metre

35 kg

420 x 345 x 735 mm

1.8 metres x 127 mm diameter

Remote control with automatic thermostat

1.1 kW/h (Rated 'A' efficiency)

Suitable applications include:

Offices

Call centres

Classrooms

Small shops

Hospital rooms

Hotels

Events

Many more

 Energy efficient

 Window kits available



Nominal cooling duty

Air flow (max)

Typical cooled area

Power supply

Noise level

Weight

Dimensions (L x W x H)

Exhaust duct

Control

Average power consumption

4.1 kW

360 m³/h

99 m³

230 V 1 ph 50 Hz Run 9 A

56 dBA @ 1 metre

45 kg

480 x 400 x 840 mm

2 metres x 127 mm diameter

Remote control with automatic thermostat

1.5 kW/h

Suitable applications include:

Offices

Call centres

Classrooms

Small shops

Hospital rooms

Hotels

Events

Many more

👉 Plug and play

📦 Window kits available



Nominal cooling duty

Air flow (max)

Typical cooled area

Power supply

Noise level

Weight

Dimensions (L x W x H)

Exhaust duct

Control

Average power consumption

4.1 kW

450 m³/h

99 m²

230 V 1ph 50 Hz Run 9 A

50 dBA @ 1 metre

34 kg

410 x 450 x 850 mm

2.5 metres x 127 mm diameter

Remote control with automatic

thermostat

1.5 kW/h

Suitable applications include:

Offices

Call centres

Classrooms

Small shops

Hospital rooms

Hotels

Events

Many more

 Energy efficient

 Window kits available



Nominal cooling duty

Air flow (max)

Typical cooled area

Power supply

Noise level (max)

Weight

Dimensions (L x W x H)

Exhaust duct

Control

Average power consumption

4.5 kW

777 m³/h

99 m³

230 V 1 ph 50 Hz Run 7.6 A

59 dBA @ 3 metres

108 kg

695 x 440 x 1,031 mm

2 x 2.5 metres x 125 mm diameter

Automatic thermostat

1.3 kW/h

Suitable applications include:

Offices

Shops

Hotels

Workshops

Classrooms


Garages

Hospitals

Many more

👉 Plug and play

🌀 High air flow

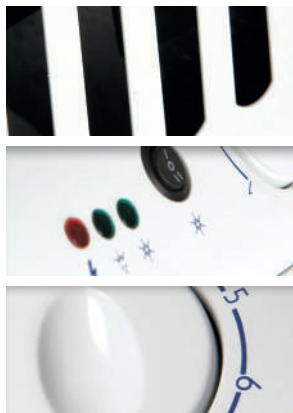

Nominal cooling duty
Air flow (max)
Typical cooled area
Power supply
Noise level (max)
Weight
Dimensions (L x W x H)
Exhaust duct
Control
Average power consumption

4.5 kW
 777 m³/h
 99 m²
 230 V 1ph 50 Hz Run 7.6 A
 59 dBA @ 3 metres
 110 kg
 746 x 485 x 1,018 mm
 2 x 2.5 metres x 140 mm diameter
 Automatic thermostat
 1.3 kW/h

Suitable applications include:

Offices	Classrooms
Shops	Garages
Hotels	Hospitals
Workshops	Many more

 Plug and play

 High air flow



Nominal cooling duty

Air flow (max)

Typical cooled area

Power supply

Noise level (max)

Weight

Dimensions (L x W x H)

Exhaust duct

Optional cold air duct

Control

Average power consumption

6.15 kW

780 m³/h

133 m³

230 V 1 ph 50 Hz Run 11 A

68 dBA @ 1 metre

86 kg

600 x 490 x 1,315 mm

8 metres x 450 mm or

3 metres x 300 mm

5 metres x 125 mm

Automatic thermostat

1.8 kW/h

Suitable applications include:

Large offices
Marquees
Medium shops
Kitchens

Computer rooms
Laboratories
Storerooms
Many more

👉 Plug and play

🌀 High air flow



Nominal cooling duty
Air flow (max)
Typical cooled area
Power supply
Plug type
Noise level (max)
Weight
Dimensions (L x W x H)
Exhaust duct
Optional cold air duct
Control
Average power consumption

7.33 kW
 960 m³/h
 159 m²
 110 V 1 ph 50 Hz Run 22 A
 BS4343 32 A
 69 dBA @ 1 metre
 98 kg
 680 x 490 x 1,315 mm
 8 metres x 450 or 3 metres x 300 mm
 5 metres x 125 mm
 Automatic thermostat
 1.8 kW/h

Suitable applications include:

Large offices	Computer rooms
Marquees	Laboratories
Medium shops	Storerooms
Kitchens	Construction

 High air flow



Nominal cooling duty

Air flow (max)

Typical cooled area

Power supply

Noise level (max)

Weight

Dimensions (L x W x H)

Exhaust duct

Optional cold air duct

Control

Average power consumption

7.33 kW

960 m³/h

159 m²

230 V 1 ph 50 Hz Run 13 A

69 dBA @ 1 metre

90 kg

680 x 490 x 1,315 mm

8 metres x 450 or 3 metres x 300 mm

5 metres x 125 mm

Automatic thermostat


2.2 kW/h

Suitable applications include:

Large offices
Marquees
Medium shops
Kitchens

Computer rooms
Laboratories
Storerooms
Many more

 High air flow



Nominal cooling duty

Air flow (Max)

Typical cooled area

Power supply

Indoor noise level (max)

Outdoor noise level (max)

Indoor weight

Outdoor weight

Indoor dimensions (L x W x H)

Outdoor dimensions (L x W x H)

PAC line length

Control

Average power consumption

4.3 kW

620 m³/h

100 m²

230 V 1ph 50 Hz Run 4.72 A

52 dBA @ 1 metres

54 dBA @ 1 metres

34 kg

14 kg

470 x 335 x 695 mm

510 x 230 x 490 mm

3 metres

Automatic thermostat

800 W/h

Suitable applications include:

Large offices
Marquees
Medium shops
Kitchens

Computer rooms
Laboratories
Storerooms
Many more

👉 Plug and play



Nominal cooling duty

Air flow (max)

Typical cooled area

Power supply

Indoor noise level (max)

Outdoor noise level (max)

Indoor weight

Outdoor weight

Indoor dimensions (L x W x H)

Outdoor dimensions (L x W x H)

PAC line length

Control

Average power consumption

4.5 kW

715 m³/h

109 m²

230 V 1ph 50 Hz Run 7.3 A

61 dBA @ 3 metres

62 dBA @ 3 metres

108 kg

20 kg

740 x 485 x 1,018 mm

560 x 280 x 520 mm

5 metres (max 30 metres)

Automatic thermostat

1.2 kW/h

Suitable applications include:

Offices

Storerooms

Computer rooms

Shops

Hotels


Events

Restaurants

Healthcare

Many more

❄ Can operate down to 10°C

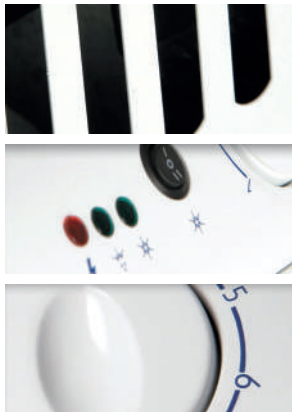

Nominal cooling duty

Air flow (max)

Typical cooled area

Power supply

Indoor noise level (max)

Outdoor noise level (max)

Indoor weight

Outdoor weight

Indoor dimensions (L x W x H)

Outdoor dimensions (L x W x H)

PAC line length

Control

Average power consumption

4.5 kW

715 m³/h

109 m²

230 V 1ph 50 Hz Run 7.3 A

61 dBA @ 3 metres

62 dBA @ 3 metres

108 kg

20 kg

740 x 485 x 1,018 mm

560 x 280 x 520 mm

5 metres (max 30 metres)

Automatic thermostat

1.2 kW/h

Suitable applications include:

Offices

Storerooms

Computer rooms

Shops

Hotels

Events

Restaurants

Healthcare

Many more

❄ Can operate down to 10°C



Nominal cooling duty
Air flow (max)
Typical cooled area
Power supply
Indoor noise level (max)
Outdoor noise level (max)
Indoor weight
Outdoor weight
Indoor dimensions (L x W x H)
Outdoor dimensions (L x W x H)
PAC line length
Control
Average power consumption
Optional cold air duct

6.47 kW
 990 m³/h
 156 m²
 230 V 1ph 50 Hz Run 11 A
 62 dBA @ 3 metres
 62 dBA @ 3 metres
 119 kg
 20 kg
 850 x 380 x 1,240 mm
 560 x 280 x 520 mm
 5 metres (max 30 metres)
 Automatic thermostat
 1.8 kW/h
 2 x 150mm x 5 metres

Suitable applications include:

Offices	Events
Computer rooms	Restaurants
Shops	Healthcare
Hotels	Many more

- ❄ Can operate down to 10°C
- 🌀 HEPA filter version available
- ⚡ Also available in 230 V 1ph 60 Hz



Nominal cooling duty

Air flow (max)

Typical cooled area

Power supply

Indoor noise level (max)

Outdoor noise level (max)

Indoor weight

Outdoor weight

Indoor dimensions (L x W x H)

Outdoor dimensions (L x W x H)

PAC line length

Control

Average power consumption

Optional cold air duct

6.47 kW

1,310 m³/h

156 m³

230 V 1ph 50 Hz Run 11 A

62 dBA @ 3 metres

62 dBA @ 3 metres

122 kg

20 kg

810 x 390 x 1,240 mm

560 x 280 x 520 mm

5 metres (max 30 metres)

Automatic thermostat

1.8 kW/h

2 x 200 mm x 5 metres

Suitable applications include:

Offices

Computer rooms

Shops

Hotels

Events


Restaurants

Healthcare

Many more

❄ Can operate down to 10°C

⚡ Also available in 230 V 1ph 60 Hz



Nominal cooling duty

Air flow (max)

Typical cooled area

Power supply

Plug type

Indoor noise level (max)

Outdoor noise level (max)

Indoor weight

Outdoor weight

Indoor dimensions (L x W x H)

Outdoor dimensions (L x W x H)

PAC line length

Control

Average power consumption

Optional cold air duct

17 kW

3,500 m³/h

410 m³

415 V 3 ph 50 Hz 17 A

BS4343 5 pin 32 A

65 dBA @ 3 metres

70 dBA @ 3 metres

230 kg

113 kg

1,000 x 640 x 1,610 mm

820 x 605 x 1,085 mm

15 metres (max 30 metres)

Automatic thermostat

5.2 kW/h

2 x 300 mm x 5 metres

Suitable applications include:

Data centres

Server rooms

Computer rooms

Events

Industrial

Manufacturing

Healthcare

Many more

❄ Can operate down to 10°C

🌀 HEPA filter adaption available



Nominal cooling duty

Air flow (max)

Typical cooled area

Power supply

Plug type

Noise level (max)

Weight

Dimensions (L x W x H)

Duct length (max)

Average power consumption

Duct Diameter

30 kW

5,900 m³/h

666 m³

415 v 3 ph N+E RUN 22 A

BS4343 32 A 5 Pin

64 dBA @ 3 metres

435 kg

1,600 x 730 x 1,660 mm

16 metres

6.8 kW/h

450 mm

Suitable applications include:

Data rooms

Storerooms

Server rooms

Workshops

Open plan areas

Events

TV and film studios

Many more

❄️ Can operate down to 10°C



Nominal cooling duty
Nominal heating duty
Air flow (max)
Typical cooled area
Power supply
Plug type
Noise level (max)
Weight
Dimensions (L x W x H)
Duct length (max)
Average power consumption
Duct Diameter

45 kW
 50 kW
 7,500 m³/h
 1,000 m²
 415 v 3 ph N+E RUN 40 A
 BS4343 63 A 5 Pin
 65.4 dBA @ 3 metres
 780 kg
 1,937 x 1,340 x 2,170 mm
 16 metres
 12.4 kW/h
 600 mm

Suitable applications include:

Data rooms	Open plan areas
Storerooms	Events
Server rooms	TV and film studios
Workshops	Many more

❄ Can operate down to 10°C

☀ Cooling and heating



Nominal cooling duty
Nominal heating duty
Air flow (max)
Typical cooled area
Power supply
Plug type
Noise level (max)
Weight
Dimensions (L x W x H)
Duct length (max)
Control
Average power consumption
Duct Diameter

90 kW
 90 kW
 15,000 m³/h
 2000 m³
 415 v 3 ph N+E RUN 84 A
 BS4343 125 A 5 Pin
 75.2 dBA @ 3 metres
 1,640 kg
 2,280 x 2,030 x 2,450 mm
 48 metres
 Automatic thermostat
 48.4 kW/h
 600 mm

Suitable applications include:


- | | |
|--------------|---------------------|
| Data rooms | Open plan areas |
| Storerooms | Events |
| Server rooms | TV and film studios |
| Workshops | Many more |

- ❄ Can operate down to 10°C
- ❄ Cooling and heating

The UK leader in portable evaporative coolers for hire

There are many applications where it is impossible or impractical to use portable air conditioners. In such cases an alternative may be the use of an evaporative air cooler.

Often used where access to an external source is unavailable, the Andrews range of stand alone evaporative air coolers are an ideal solution to uncomfortable conditions.

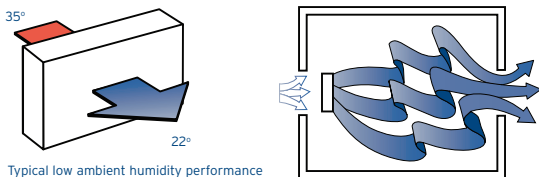

The evaporative concept is designed to cool fresh air through the process of natural evaporation by drawing air across a wet filter and providing a refreshing air flow. As the air passes the wet filter, a drop in temperature will be experienced, although the overall room temperature will not be reduced. The unit will provide a localised comfort cooling zone.

Applications for the smaller evaporative coolers

- Offices
- Shops
- Restaurants
- Schools
- Kitchens
- Banks

Applications for the Eventair evaporative coolers

- Sports halls and gymnasiums
- Large manufacturing areas
- Outdoor events and marquees
- Large retail outlets
- Night clubs



Average duty

Air flow

Typical cooled area

Power supply

Plug type

Noise level (max)

Weight

Dimensions (L x W x H)

Reservoir capacity

Power consumption (max)

2 l/h

928 m³/h

40 m³

230 V 1 ph 50 Hz Run 0.4 A

BS1363 230 V

54 dBA @ 1 metre

11.5 kg empty / 25 kg full

460 x 340 x 660 mm

12 litres

92 W/h

Suitable applications include:

Offices

Workshops

Call centres

Shops

Schools

Restaurants

Hospitality units

Many more

👉 Plug and play




Average duty
Air flow (max)
Typical cooled area
Power supply
Plug type
Noise level (max)
Weight
Dimensions (L x W x H)
Reservoir capacity
Power consumption

5.5 l/h
1,750 m³/h
80 m³
230 V 1ph 50 Hz Run 1.6 A
BS1363 230 V
59 dBA @ 1 metre
16.5 kg empty / 61 kg full
645 x 530 x 915 mm
45 litres
368 W/h

Suitable applications include:

Offices	Schools
Workshops	Restaurants
Call centres	Hospitality units
Shops	Many more

👉 Plug and play



Average duty
Air flow (max)
Typical cooled area
Power supply
Plug type
Noise level (max)
Weight
Dimensions (L x W x H)
Reservoir capacity
Power consumption

10 l/h
 2,550 m³/h
 120 m²
 230 V 1 ph 50 Hz Run 1.6 A
 BS1363 230 V
 59 dBA @ 1 metre
 25 kg empty / 70 kg full
 645 x 530 x 1,315 mm
 45 litres
 368 W/h

Suitable applications include:

Offices	Schools
Workshops	Restaurants
Call centres	Hospitality units
Shops	Many more

👉 Plug and play

The UK leader in fluid chillers, fast chillers and air handlers for hire

We offer you fully portable fluid and low temperature chillers, delivered and installed fast from depots nationwide: a genuine 24/7 service, 365 days a year. With free site surveys, expert advice and a wide range to choose from, our specialists will help ensure you get the equipment you need at the right price.

Fluid chillers - ideal for applications and locations that need quick and reliable temporary cooling. All chillers can be used in parallel to achieve the cooling capacity you need. They are typically used for:


- **Air Conditioning when used with air handlers/fan coils**
- **Process applications in manufacturing e.g. for volatile petrochemicals, fluids and food products**
- **Facilities Management, Building & Construction and HVAC contractors**
- **Bypassing existing systems for planned maintenance, during breakdowns or for disaster recovery**

When sizing a chiller for air conditioning applications the same principles should be applied that are mentioned in the air conditioning section of this booklet. The location of the air handlers, fan coils and chiller does require careful consideration and we would therefore suggest that a site survey is carried out by one of Andrews specialists.

Process applications and breakdown/recovery applications require a great deal of calculation to guarantee that flow rates, design temperature and other requirements are met, it is therefore essential that an Andrews specialist is consulted about such applications.

In addition to providing the chillers, air handlers and fan coils, Andrews also provide all necessary accessories and additional equipment. This includes generators, distribution units, cable, flexible hoses, heat exchangers, valves, pipework, adapters, and flexible ducting.

The Andrews specialist hire team offer FREE on-site surveys and advice, together with a delivery, installation and on-site commissioning service. Once the equipment is installed it is supported 24 hours a day, 7 days a week by the Andrews service back-up from over 25 depots nationwide.

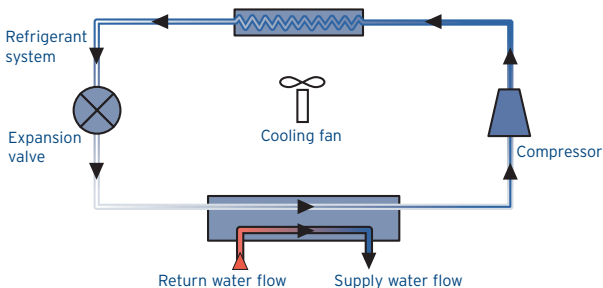Basic operating principle of a water chiller


The Andrews range of high capacity fluid chillers have been developed to provide a fast and efficient solution for many applications that require high volumes of cooling capacity. In the standard format fluid chillers can provide cooling water to production processes or to bypass/assist permanently installed chillers. When used along with our wide range of air handlers and fan coils, fluid chillers provide high capacity air conditioning for a wide range of applications.

The standard range comprises of units up to 750kW in capacity and can be used in parallel to achieve higher capacities. Larger units for long term applications are also available. A wide range of temperatures can be provided, with units able to achieve water temperatures below -12°C . Heat pump versions are available on some models to provide not only cooling but also heating.

All of the units in the Andrews fluid chiller range are air cooled and do not require a permanent water supply. The chiller unit must be placed in a well ventilated area that is able to accept the heat dissipation from the area being cooled. Ideally chillers should always be installed on the exterior of the building, where the ambient air can provide cooling.

Each of the units contains a heat exchanger, condenser, control system, compressor and circulating pumps. Mounted on robust base plates complete with lifting facility, the units can be transported and positioned with the minimum of disruption. The water connection on the supply and return pipework is normally achieved with quick action couplings, removing the need for complicated pipe connections. The chillers use flexible hoses to provide chilled water to either the air handlers or the clients own system.

The operation of high capacity fluid chillers

Andrews offer 3 principle methods of using fluid chillers. These are as follows:



This is where a fluid chiller (or chillers) are connected to air handling units (AHU) or fan coils via flexible pipework.


The chiller provides chilled water to each of the fan coils or AHU, which is then pumped through a coil over which the room air is passed. As the air passes over the cold coil the air temperature will drop, the drop in temperature will depend on several factors such as air flow, air temperature and humidity. Each time the air is passed over the cold coil a similar drop in temperature will take place, this will enable the room temperature to be controlled within specified criteria. As the warm air passes over the cold coil the chilled water temperature rises and therefore returns to the chiller as warm water, the water is then chilled again and returned to the air handlers or fan coils and so the circuit is closed.

Some fan coils have thermostatically operated valves which open and close in relation to the room temperature, bringing in chilled water when required and remaining closed when the desired temperature is achieved. The chiller operates as required depending on the water temperature, although the circulating pump operates at all times.

The normal installation has the fan coils units installed within the room that requires cooling, or AHU installed outside of the room with the air ducted into the room and returned via heavy duty flexible ducting. However in some circumstances it is possible to fit flexible ducting to the fan coils and in others it is possible to install the AHU within the room that is to be cooled.

With heat pump versions of the fluid chillers it is possible to generate hot water and thereby use the fan coils and AHUs as heaters rather than air conditioners. In applications that may require heating at night and cooling by day it is possible to fully automate this process.


Fluid Chiller

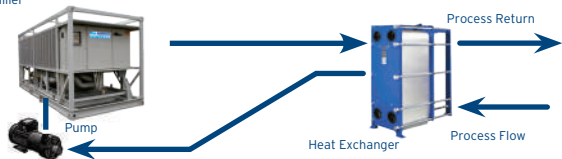

This system is often used where a product requires cooling but due to its nature or consistency cannot come into contact with the refrigeration process. Such products include oil, volatile fluids and food products. Andrews overcome this problem by using a fluid chiller in conjunction with a process heat exchanger (normally a plate type).

The fluid chiller produces chilled water which is then circulated through the heat exchanger and then returned to the chiller in a closed circuit. The product that requires cooling is also circulated through the heat exchanger but is kept separate from the chilled water at all times. As the product passes through the heat exchanger it is cooled by the chilled water that is being circulated at the same time, this enables the product's temperature to be reduced to the specified level. As the chilled water passes through the same heat exchanger its temperature will rise, as it is effectively being heated by the product. The water will then become warm as it is returned to the chiller to become chilled once more and so the circuit is closed.

The connection between the heat exchanger and the chiller would normally be through flexible pipes with quick release couplings. The temperature can be controlled by the control system within the chiller itself. This application can be easily adjusted to suit most environments.

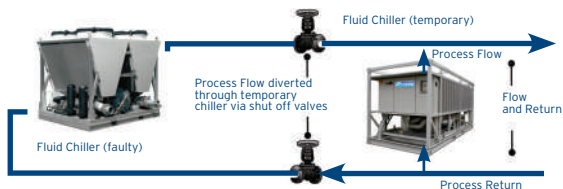

This application can normally be used where an existing chiller system has broken down, is required to be taken out of operation or needs additional cooling assistance. Such situations may be due to building modifications, maintenance shut downs, main plant failure or abnormal heat loads within the building.

An Andrews fluid chiller can be connected into the clients own pipework system using flanged connections which will be fitted with isolating valves and quick release pipe adapters. Flexible hoses would then connect onto the pipework and run to the temporary chiller.

Where possible the client's own pipework, circulating pumps and controls continue to be used. In some situations the circulating pumps within the chiller may be adequate to cope, or can assist the existing pumps.

Careful consideration must be given to the effect of increasing the flow rate of the chilled water, if the temporary chiller is to be used in conjunction with an existing system. Andrews specialists are able to advise on the correct sizing and correct use of such applications, however it is vital that details of the required flow rates, temperatures and cooling duty are known. A full system diagram of the existing installation is also required. Such systems can be used as a semi-permanent solution or as an emergency back up.



Nominal cooling duty

Air flow (max)

Plug type

Power supply

Indoor noise level (max)

Outdoor noise level (max)

Indoor weight

Outdoor weight

Indoor dimensions (L x W x H)

Outdoor dimensions (L x W x H)

Control

Average power consumption

Line length

Operating temp range

Generator size

6.1 kW

3,000 m³/h

BS4343 230 V 32 A

230 V 1ph 50 Hz Run 24 A

55 dBA @ 3 metres

65.1 dBA @ 1 metre

120 kg

75 kg

900 x 790 x 895 mm

700 x 680 x 670 mm

Automatic thermostat

4.1 kW/h

15 metres (max = 30 metres)

-10°C to +30°C

12 kVA

Suitable applications include:

Cold stores

Refrigerated warehouses

Industrial processes

Temporary body storage

storage

Food and beverage


Archive document

storage

Many more

❄️ High-capacity cooling

❄️ Capable of cooling down to -10 °C



Nominal cooling duty

Air flow (max)

Plug type

Power supply

Indoor noise level (max)

Outdoor noise level (max)

Indoor weight

Outdoor weight

Indoor dimensions (L x W x H)

Outdoor dimensions (L x W x H)

Control

Average power consumption

Line length

Operating temp range

Generator size

13.1 kW

5,600 m³/h

BS4343 32 A 3 ph N+E

415 V 3 ph N+E 50 Hz Run 24 A

60 dBA @ 3 metres

70 dBA @ 1 metre

330 kg

175 kg

1,240 x 900 x 1,700 mm

1,240 x 900 x 900 mm

Automatic thermostat

7.4 kW/h

15 metres (max = 30 metres)

-10°C to +30°C

20 kVA

Suitable applications include:

Cold stores

Refrigerated warehouses

Industrial processes

Temporary body

storage

Food and beverage

Archive document

storage

Many more

☼ High-capacity cooling

❄ Capable of cooling down to -10 °C



Nominal cooling duty

Air flow (max)

Plug type

Power supply

Indoor noise level (max)

Outdoor noise level (max)

Indoor weight

Outdoor weight

Indoor dimensions (L x W x H)

Outdoor dimensions (L x W x H)

Control

Average power consumption

Line length

Operating temp range

Generator size

26.3 kW

10,000 m³/h

63 A 3 ph N+E

415 V 3 ph N+E 50 Hz Run 37 A

63 dBA @ 3 metres

73 dBA @ 1 metre

597 kg

460 kg

2,000 x 1,400 x 1,850 mm

1,450 x 1,350 x 1,800 mm

Automatic thermostat

11 kW/h

15 metres (max = 30 metres)

-10°C to +30°C

30 kVA

Suitable applications include:

Cold stores

Refrigerated warehouses

Industrial processes

Temporary body

storage

Food and beverage

Archive document


storage


Many more

❄️ High-capacity cooling

❄️ Capable of cooling down to -10 °C

Graphs FC 21/FC 45/FC 90

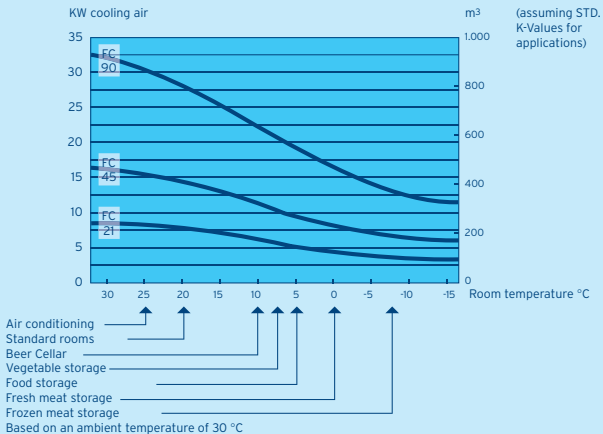



Nominal cooling duty

Power supply

Plug type

Noise level (max)

Weight

Dimensions (L x W x H)

Control

Average power consumption

Generator size

Water connection

Nominal water flow

30 kW

415 V 3 ph N+E 50 Hz Run 19 A

BS4343 32 A 5 pin

73 dBA

350 kg

1,600 x 860 x 1,700 mm

Automatic programmer

5.9 kW/h

30 kVA

32 mm (1 1/4") Camlock

1.75 l/s

Suitable applications include:

Product storage

Process cooling

Pharmaceuticals

Food and beverages

Events

Agriculture

Industry

Many more

⊗ High-capacity cooling



Nominal cooling duty
Nominal heating duty (HP version)
Power supply
Plug type
Noise level (max)
Weight
Dimensions (L x W x H)
Control
Average power consumption
Generator size
Water connection
Nominal water flow

30kW
 33 kW
 415 V 3 ph N+E 50 Hz Run 25.7 A
 BS4343 32 A 5 pin
 70 dBA / 95 LWA @ 10 metres
 635 kg
 1,770 x 780 x 1,707 mm
 Automatic programmer
 7.9 kW/h
 30 kVA
 32mm (1 1/4") Camlock
 1.4 l/s

Suitable applications include:

Product storage	Events
Process cooling	Agriculture
Pharmaceuticals	Industry
Food and beverages	Many more

Cooling and heating



Nominal cooling duty

Power supply

Plug type

Noise level (max)

Weight

Dimensions (L x W x H)

Control

Average power consumption

Generator size

Water connection

Nominal water flow

50 kW

415 V 3 ph N+E 50 Hz Run 50.1 A

BS4343 63 A 5 pin

70 dBA / 95 LWA @ 10 metres

1,290kg

2,471 x 1,266 x 2,345 mm

Automatic programmer

15.6 kW/h

60 kVA

50mm (2") Bauer

2.7 l/s

Suitable applications include:

Food and beverage

Construction

Healthcare

Manufacturing

Events

Pharmaceuticals

Sever rooms

Many more

⊗ High-capacity cooling



Nominal cooling duty

Power supply

Plug type

Noise level (max)

Weight

Dimensions (L x W x H)

Control

Average power consumption

Generator size

Water connection

Nominal water flow

100 kW

415 V 3 ph N+E 50 Hz Run 58 A

BS4343 63 A 5 pin

86 dBA / 104 LWA @ 10 metres

1,650 kg

3,090 x 1,330 x 2,775 mm

Automatic programmer

18 kW/h

60 kVA

50 mm (2") bauer

3 l/s

Suitable applications include:

Food and beverage

Construction

Healthcare

Manufacturing

Events

Pharmaceuticals

Sever rooms

Many more

✳ High-capacity cooling



Nominal cooling duty

Power supply

Plug type

Noise level (max)

Weight

Dimensions (L x W x H)

Control

Average power consumption

Generator size

Water connection

Nominal water flow

100 kW

415 V 3 ph N+E 50 Hz Run 62.4 A

BS4343 63 A 5 pin

86 dBA / 99 LWA @ 10 metres

1,320 kg

3,187 x 1,216 x 2,416 mm

Automatic programmer

19 kW/h

60 kVA

50 mm (2") bauer

3.75 l/s

Suitable applications include:

Food and beverage

Construction

Healthcare

Manufacturing

Events

Pharmaceuticals

Sever rooms

Many more

☼ High-capacity cooling



Nominal cooling duty
Nominal heating duty (HP version)
Power supply
Plug type
Noise level (max)
Weight
Dimensions (L x W x H)
Control
Average power consumption
Generator size
Water connection
Nominal water flow
Low temperature

100 kW
 115 kW
 415 V 3 ph N+E 50 Hz Run 104.2 A
 BS4343 125 A 5 pin
 68.5 dBA / 95 LWA @ 10 metres
 2,030 kg
 2,965 x 1,270 x 2,740 mm
 Automatic programmer
 32 kW/h
 95 kVA
 50 mm (2") bauer
 4.72 l/s
 Down to -12°C

Suitable applications include:

- | | |
|-------------------|-----------------|
| Food and beverage | Events |
| Construction | Pharmaceuticals |
| Healthcare | Sever rooms |
| Manufacturing | Many more |

Cooling and heating




Nominal cooling duty
Nominal heating duty (HP version)
Power supply
Plug type
Noise level (max)
Weight
Dimensions (L x W x H)
Control
Average power consumption
Generator size
Water connection
Nominal water flow
Low temperature

200 kW
 200 kW
 415 V 3 ph N+E 50 Hz Run 120 A
 Hard wired 5 core x 35 mm²
 54 dBA / 81 LWA @ 10 metres
 2,900 kg
 4,100 x 2,300 x 2,700 mm
 Automatic programmer
 37 kW/h
 120 kVA
 80 mm (3") bauer
 9 l/s
 Down to -10°C

Suitable applications include:

Food and beverage	Events
Construction	Pharmaceuticals
Healthcare	Sever rooms
Manufacturing	Many more

 Cooling and heating



Nominal cooling duty

Power supply

Plug type

Noise level (max)

Weight

Dimensions (L x W x H)

Control

Average power consumption

Generator size

Water connection

Nominal water flow

Low temperature

250kW

415 V 3 ph +E 50 Hz Run 144A

Hard wired 4 x 95 mm²

80 dBA / 106 LWA @ 10 metres

2,810 kg

4,874 x 2,282 x 2,190 mm Automatic

programmer

44.8 kW/h

140 kVA

80 mm (3") bauer

9 l/s

Down to -5°C

Suitable applications include:

Food and beverage

Construction

Healthcare

Manufacturing


Events

Pharmaceuticals

Sever rooms

Many more

High-capacity cooling



Nominal cooling duty

Power supply

Plug type

Noise level (max)

Weight

Dimensions (L x W x H)

Control

Average power consumption

Generator size

Water connection

Nominal water flow

Low temp

375 kW

415 V 3 ph +E 50 hz Run 199 A

Hard wire (4 x 95 mm²)

70 dBA / 95 LWA @ 10 metres

5,220 kg

6,058 x 2,438 x 2,591 mm

Automatic programmer

61 kW/h

180 kVA

100 mm (4") bauer / DN100

PN16 Flange

17.5 l/s

-12°C

Suitable applications include:

Hotels

Process cooling

Construction

Food and beverages


Healthcare

Data centres

Petrochemicals

Many more

✳ High-capacity cooling



Nominal cooling duty

Power supply

Plug type

Noise level (max)

Weight

Dimensions (L x W x H)

Control

Average power consumption

Generator size

Water connection

Nominal water flow

Low temp

400 kW

415 V 3 ph +E 50 hz Run 320 A

Hard wire (4 x 95 mm²)

77 dBA / 105 LWA @ 10 metres

4,200 kg

3,490 x 2,438 x 2,590 mm

Automatic programmer

99 kW/h

300 KVA

100 mm (4") bauer / DN100

PN16 Flange

20 l/s

-10°C

Suitable applications include:

Hotels

Process cooling

Construction

Food and beverages

Healthcare

Data centres

Petrochemicals

Many more

High-capacity cooling



Nominal cooling duty

Power supply

Plug type

Noise level (max)

Weight

Dimensions (L x W x H)

Control

Average power consumption

Generator size

Water connection

Nominal water flow

Low temp

550 kW

415 V 3 ph +E 50 Hz Run 385 A

Hard wired (4 x 120 mm²)

75 dBA / 101 LWA @ 10 metres

4,100 kg

3,490 x 2,438 x 2,590 mm

Automatic programmer

119 kW/h

350 kVA

100mm (4") bauer / DN100

PN16 Flange

27 l/s

-10°C

Suitable applications include:

Hotels

Process cooling

Construction

Food and beverages

Healthcare

Data centres

Petrochemicals

Many more

 High-capacity cooling



Nominal cooling duty
Power supply
Plug type
Noise level (max)
Weight
Dimensions (L x W x H)
Control
Average power consumption
Generator size
Water connection
Nominal water flow

550 kW
 415 V 3ph +E 50 Hz Run 346 A
 Power lock connections (4x 120 mm)
 64 dBA / 70 LWA @ 10 metres
 4,650 kg
 4,940 x 2,440 x 2,590 mm
 Automatic programmer
 107 kW/h
 400 kVA
 100 mm (4") bauer
 24.8 l/s

Suitable applications include:

IT / Data centres	Hotels
Offices	Schools
Hospitals	Restaurants
Retail	Many more

High-capacity cooling



Nominal cooling duty

Power supply

Plug type

Noise level (max)

Weight

Dimensions (L x W x H)

Control

Average power consumption

Generator size

Water connection

Nominal water flow

Low temp

750 kW

415 V 3 ph +E 50 Hz Run 576 A
plus pump set

Hard wired (4 x 240 mm²)

77 dBA / 105 LWA @ 10 metres

7,450 kg

6,058 x 2,438 x 2,591 mm

Automatic programmer

179 kW/h

550 kVA

100mm (4") bauer / DN100

PN16 Flange

32.5 l/s

-12°C

Suitable applications include:

Hotels

Process cooling

Construction

Food and beverages

Healthcare

Data centres

Petrochemicals

Many more

 High-capacity cooling



Nominal cooling duty

Power supply

Plug type

Noise level (max)

Weight

Dimensions (L x W x H)

Control

Average power consumption

Generator size

Water connection

Nominal water flow

Low temp

750 kW

415 V 3 ph +E 50 Hz Run 570 A plus pump set

Hard wired (4 x 240 mm²)

61 dBA / 87 LWA @ 10 metres

7,350 kg

5,400 x 2,450x 2,780 mm

Automatic programmer

177 kW/h

550 kVA

100mm (4") bauer / DN100

PN16 Flange

34 l/s

-12°C

Suitable applications include:

Hotels

Process cooling

Construction

Food and beverages



Healthcare

Data centres

Petrochemicals

Many more

High-capacity cooling



Nominal cooling duty

Nominal heating duty

Air flow (max)

Power supply

Plug type

Noise level (max)

Weight

Dimensions (L x W x H)

Control

Average power consumption

Integral condensate pump

Fan speed controller

15 kW

30 kW

2,048 m³/h

230 V 1 ph 50 Hz Run 3 A

BS1363 230 v

56 dBA @ 1 metre

96 kg

650 x 500 x 2,060 mm (with top box)

Automatic thermostat

690 W/h

Yes

Yes

Suitable applications include:

Hotels

Offices

Events


Food and beverages

Healthcare

Data centres

Petrochemicals

Many more

 Cooling and heating



Nominal cooling duty

Nominal heating duty

Air flow (max)

Power supply

Plug type

Noise level (max)

Weight

Dimensions (L x W x H)

Control

Average power consumption

Integral condensate pump

Fan speed controller

15 kW

30 kW

1,200 m³/h

230 V 1ph 50 Hz Run 3 A

BS1363 230 v

52 dBA @ 1 metre

70 kg

540 x 300 x 1,800 mm

Automatic thermostat

690 W/h

Yes

Yes

Suitable applications include:

Offices

Hotels

Events

Food and beverages


Healthcare

Data centres

Petrochemicals

Many more

 Cooling and heating




Nominal cooling duty
Nominal heating duty
Air flow (max)
Power supply
Plug type
Noise level (max)
Weight
Dimensions (L x W x H)
Control
Average power consumption
Integral condensate pump
Fan speed controller

15 kW
 30 kW
 2,700 m³/h
 230 V 1ph 50 Hz Run 5 A
 BS1363 13 A
 51 dBA @ 1 metre
 70 kg
 600 x 380 x 1,930 mm
 Automatic thermostat
 345 W/h
 Yes
 Yes

Suitable applications include:

Offices	Healthcare
Hotels	Data centres
Events	Petrochemicals
Food and beverages	Many more

 Cooling and heating



Nominal cooling duty
Nominal heating duty
Air flow (max)
Power supply
Plug type
Noise level (max)
Weight
Dimensions (L x W x H)

30 kW
 60 kW
 4,197 m³/h
 230 V 1 ph 50 HZ Run 4 A
 BS1363 230 v
 58.5 dBA @ 1 metre
 140 kg
 1,050 x 500 x 2,060 mm (with top box)

Control
Average power consumption
Integral condensate pump
Fan speed controller

Automatic thermostat
 920 W/h
 Yes
 Yes

Suitable applications include:

- | | |
|--------------------|----------------|
| Offices | Healthcare |
| Hotels | Data centres |
| Events | Petrochemicals |
| Food and beverages | Many more |

Cooling and heating



Nominal cooling duty

Nominal heating duty

Air flow (max)

Power supply

Plug type

Noise level (max)

Weight

Dimensions (L x W x H)

Control

Average power consumption

Integral condensate pump

Fan speed controller

30 kW

60 kW

4,197 m³/h

230 V 1 ph 50 HZ Run 8 A

BS1363 13 A

59 dBA @ 1 metre

160 kg

860 x 542 x 2,025 mm (with top box)

Automatic thermostat

1,61 kW/h

Yes

Yes

Suitable applications include:

Offices

Hotels

Events


Food and beverages

Healthcare

Data centres

Petrochemicals

Many more

 Cooling and heating




Nominal cooling duty
Nominal heating duty
Air flow (max)
Power supply
Plug type
Noise level (max)
Weight
Dimensions (L x W x H)
Duct length (max)
Duct size
Average power consumption
Integral condensate pump
Fan speed controller
Water connection

50 kW
 100 kW
 11,500 m³/h
 415 V 3 ph 50 Hz N+E Run 6 A
 BS4343 5 Pin 32 A
 44 dBA @ 1 metre
 330 kg
 1,600 x 790x 1,510 mm
 40 metres
 2 x 600 mm (inlet & outlet)
 1.8 kW/h
 Yes
 Yes (inverter drive technology)
 50 mm (2") bauer

Suitable applications include:

Offices	Healthcare
Hotels	Data centres
Events	Petrochemicals
Food and beverages	Many more

Cooling and heating



Nominal cooling duty

Nominal heating duty

Air flow (max)

Power supply

Plug type

Noise level (max)

Weight

Dimensions (L x W x H)

Average power consumption

Integral condensate pump

Fan speed controller

Optional - 600 mm duct under plenum box

50 kW

100 kW

4,500 m³/h

230 V 1ph 50 Hz Run 4.8 A

BS4343 230 V 16 A

74 dBA @ 1 metre

460 kg

1,500 x 750 x 2,250 mm (with top box)

1.2 kW/h

Yes

Yes

Suitable applications include:

Offices

Hotels

Events


Food and beverages

Healthcare

Data centres

Petrochemicals

Many more

 Cooling and heating



Nominal cooling duty

Nominal heating duty

Air flow (max)

Power supply

Plug type

Noise level (max)

Weight

Dimensions (L x W x H)

Duct length (max)

Duct size

Average power consumption

Integral condensate pump

Fan speed controller

Water connection

150 kW

300 kW

20,160 m³/h

415 V 3 ph 50 Hz N+E Run 20 A

BS4343 5 Pin 32 A

84 dBA @ 1 metre

934 kg

2,260 x 1,980 x 1,700 mm

48 metres

4 x 600 mm (2x inlet / 2x outlet)

14.3 kW/h

Yes

No

50 mm (2") bauer

Suitable applications include:

Offices

Hotels

Events

Food and beverages

Healthcare

Data centres

Petrochemicals

Many more

Cooling and heating



Nominal cooling duty

Nominal heating duty

Air flow (max)

Power supply

Plug type

Noise level (max)

Weight

Dimensions (L x W x H)

Duct length (max)

Duct size

Average power consumption

Integral condensate pump

Fan speed controller

Water connection

150 kW

300 kW

22,200 m³/h

415 V 3 ph 50 Hz N+E Run 10 A

BS4343 5 Pin 32 A

69 dBA @ 1 metre

1,100 kg

2,200 x 2,100x 1,700 mm

48 metres

4 x 600 mm (2x inlet / 2x outlet)

3.1 kW/h

Yes

Yes (Inverter drive technology)

50 mm (2") bauer

Suitable applications include:

Offices

Hotels

Events

Food and beverages


Healthcare

Data centres

Petrochemicals

Many more

 Cooling and heating

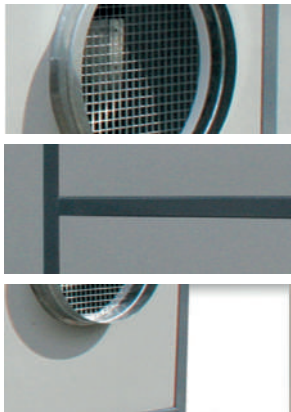

Nominal cooling capacity

Nominal heating capacity

Air flow (max)

Power supply

Plug type

Noise level (max)

Weight

Dimensions (L x W x H)

Duct length (max)

Duct size

Average power consumption

Integral condensate pump

Fan speed controller

Water connection

300 kW

600 kW

35,388 m³/h

415 V 3 ph 50 Hz N+E Run 30 A

BS4343 5 Pin 32 A

81 dBA @ 5 metres

2,150 kg

3,780 x 2,340 x 2,590 mm

48 metres

8 x 600 mm (4x inlet / 4x outlet)

21 kW/h

Yes

No

100 mm (4") bauer

Suitable applications include:

Offices

Hotels

Events

Food and beverages


Healthcare

Data centres

Petrochemicals

Many more

Cooling and heating

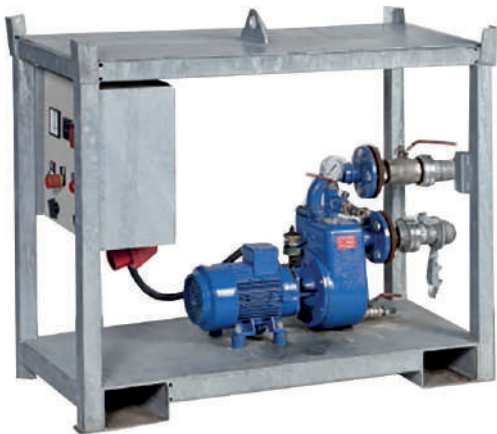

Andrews Sykes Pumps deliver the most dependable pump hire equipment and the most effective pumping solutions for all your cooling requirements.

From fixed to variable speed pumping equipment, Andrews can supply the complete solution. We can offer a complete end-to-end service: from site surveys and planning, through consultancy and engineering skills, to expert installation. Our pumps can handle almost every conceivable need, from high pressure chilled water supply to hot water supply for central heating plants.



Andrews Heat Exchanger hire offer the biggest range of Heat Exchangers, air handlers and cooling accessories for hire in the UK.


We can deliver to you fast from our nationwide depots and unlike other suppliers we guarantee a "genuine" 24/7 365 days a year fast and friendly service. We will help you decide which Heat exchanger hire unit is best for you to help with your process applications. Our Heat Exchanger Rental service promise is to be onsite within four hours of your call with reliable and tested Heat Exchangers for all of your cooling or heating requirements.

Andrews portable heaters are used for many applications within a wide range of environments, including; building and construction, event hire, heavy industry, manufacturing, storage and warehousing, public sector, facilities management, offices, schools and agriculture. The Andrews range of portable heaters provide; safe, efficient and flexible heat to ensure a pleasant working environment or to dry damp areas. When buildings, plants or products must remain frost or cold free or when the cold jeopardises a timely delivery Andrews can offer a solution. When festivals, fairs and exhibitions need to be heated, we help out. Where existing heating system malfunction, we provide temporary mobile solutions. Andrews develop, hire and sell mobile heaters, which are focused on three key characteristics: **safety, efficiency and sustainability.**

Our heaters are split into three groups based on the fuel used to power them - electric, gas and oil. Gas heaters are normally for use with LPG bottled gas, oil fired heaters can be used with heating oil, diesel or kerosene. Some units can be modified for use with bio oil. Gas and oil heaters are available in either direct fired or indirect fired designs.

Direct fired

A direct fired heater uses an electric fan to provide combustion air and also the main air flow to give large volumes of heated air. Fuel is injected into a combustion chamber where it is ignited and burnt at a regulated rate mixing with the main air stream from the fan.

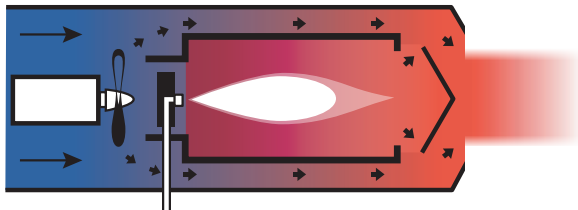


A free site survey by an Andrews heating specialist will help you work out exactly what model and set-up is right for your location and application.

For health and safety reasons, it is essential that you choose and operate the right type of heater for your location and application. We will be pleased to advise you on the safest and most appropriate heater(s) to use.

All direct fired heaters require permanent ventilation to the outside atmosphere and it's recommended to allow a minimum of 6.5cm^2 for every 293W of heat input. Call us on **0800 211 611** for help and advice or more details.

Indirect fired

An indirect fired heater is a more sophisticated form of portable heater which is used to provide large volumes of clean dry heat without any products of combustion. Fuel is injected into a gas tight combustion chamber where it is ignited and burnt at a regulated rate.

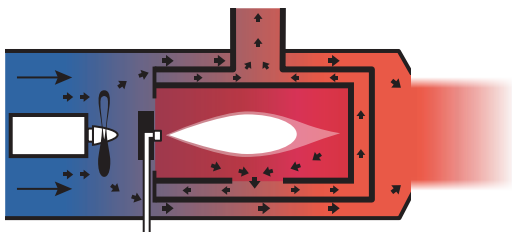

The products of combustion are exhausted via a simple flue arrangement out to the atmosphere. Electric fans provide combustion air and the main air flow which collects heat indirectly from the heated chamber which is then expelled into the area to be heated.

Indirect heaters are ideal for areas where there is limited ventilation or where there is danger posed by combustible materials. The clean dry heat produced creates a safe, warm fume free environment. Andrews Indirect heaters are capable of distributing heat to inaccessible locations with the addition of an outlet spigot and flexible ducting.

Electric

Andrews electric heaters provide customers with a quick, reliable and economical way of warming a variety of applications and offer heating capacities between 2.8kW and 42kW. Split into four groups - fan assisted, oil-filled, quartz heaters and convectors - our electric models offer safe, gas-free heating suitable for a broad range of applications. These include hospitals, offices, construction projects, marquees, storerooms, workshops, garages and many more.

While the majority of our electric heaters are used for warming environments populated by people, it is also very common for our units to be used in conjunction with dehumidifiers. This is often the most efficient way of drying damp buildings, furniture and equipment, which is why our heaters and dehumidifier units are regularly hired as a package.



Calculations to determine the correct size of Andrews portable heaters to use are shown below.

Determine the temperature rise required inside the space to be heated in °C.

Find the volume of the space in cubic metres i.e. L x W x H in metres.

What sort of insulation does the building have?

- Well insulated k = 1.2
- Average k = 2.2
- Badly insulated k = 3.0
- Hardly any insulation k = 4.0

Amount of heat required = Temperature rise °C x Volume in m³ x K x 1.18 = heating requirement in watts

NB: divide by 1000 to give kW.

When recirculation is used, the capacity required can be reduced by as much as 25%. Less power is required or used when the target application is already warm, as the unit draws on this air and uses a smaller amount of energy when converting it into output heat.

For fixed permanent installations a full heat loss calculation must be made to take into account construction of the building, air changes etc. Your local Andrews depot will be pleased to help when required.

Marquee Heating

For the calculation of the heating capacity of marquees, depending on the surface, and the time of the year, other standards apply, but the following provides a useful guide:

● January	approximately 400 Watt/m ²
● February	approximately 400 Watt/m ²
● March	approximately 400 Watt/m ²
● April	approximately 300 Watt/m ²
● May until September	approximately 250 Watt/m ²
● October	approximately 300 Watt/m ²
● November	approximately 400 Watt/m ²
● December	approximately 400 Watt/m ²

Positioning Andrews heaters

When positioning mobile heaters it is important that the fan has enough space to draw in air. The hot air flow coming out of the device should be directed towards the area requiring heat. When using multiple heaters, the devices should be placed in such a way that the air streams do not overlap. Indirect-fired heaters and electric heaters can also be set up outside of the room. The heated air can then be transferred to the room through flexible ducting.

If the temperature of the outside air is considerably lower than the temperature of the air inside, this will reduce the heat output of the equipment.

Outside or inside installation

Heaters with capacities of over 100kW are, because of their large size, often placed outside. In that case, the heated air is transported inside via flexible ducts. A major disadvantage of a heater arranged outside is that there is significantly more energy required, and thus fuel, than with a heater arranged inside. An inside heater heats on the basis of recirculation, and heats up already heated air. A heater that is located outdoors, heats relatively cold outside air and then blows it inside. It is therefore logical that a heater arranged outside needs a lot more time to get a space at the desired temperature than an inside heater. Hence, the fuel costs in an outdoor installation is often 2 to 3 times higher, depending

on the desired indoor temperature and the outdoor temperature. For that reason, Andrews produces compact heaters that can get through most doors. Also, there is the possibility to provide an outdoor heater with a hose, to recirculate already heated air. In this way, energy costs can be reduced.

Fuel

Our range of heaters are powered by a number of different fuels: diesel (so-called red diesel), kerosene, natural gas and propane. Andrews can supply all fuel types and for large applications we can supply bulk tanks which are installed outside. Andrews has many environmental tanks for heating oil, double walled IBC tanks with a capacity of 1,000 to 10,000 litres. For propane Andrews works with several leading gas suppliers who can deliver bulk propane tanks with a capacity of up to 5,000 litres. By making use of a bulk tank, heating is not only very easy, but labour cost is also considerably reduced. We are constantly exploring the benefits of biofuels and other alternatives to the more traditional options of diesel and LPG gas. For this reason, we are delighted to be able to now offer customers hydrotreated vegetable oil (HVO) following a sharp rise in popularity.

See pages 105 - 108 for more information on our fuel options*

Energy consumption and costs

Electric heaters are widely used because of the ease of operation and the production of clean, dry heat. Especially for small spaces, with a capacity of up to 500 m³, the electric heater is an excellent heat source at an attractive rate for hire. However, keep in mind that an electric heater uses more energy than other heat sources.

HVO fuel

HVO fuel is a synthetic, premium quality biofuel made from 100% renewable raw materials. Specifically introduced for use in conjunction with all products featuring modern diesel engines, HVO is widely accepted as being a practical like-for-like

replacement for regular diesel. The addition of HVO fuel is aligned with our commitment to finding greener ways of working and represents the perfect choice for UK businesses looking to minimise their carbon footprint.





Nominal heating duty

Air flow (max)

Typical heated area

Power supply

Plug type

Noise level (max)

Weight

Dimensions (L x W x H)

Control

Power consumption

2.8 kW

250 m³/h

67.6 m³

230 / 110 V 1 ph 50 Hz versions

available Run 12.2 / 25.4 A

BS1363 230 V or BS4343 32 A 110V

50.6 dBA @ 3 metres

11 kg

320 x 260 x 360 mm

DE25 Manual or DE25T (integral thermostat)

2.8 kW/h

Suitable applications include:

Offices

Construction

Marquees

Hotels


Workshops

Ships

Education

Many more

👉 Plug and play

**Nominal heating duty****Air flow (max)****Typical heated area****Power supply****Generator size****Plug type****Noise level (max)****Weight****Dimensions (L x W x H)****Control****Power consumption**

13 kW

600 m³/h314 m²

415 V 3 ph +E 50 Hz Run 18.2 A

16.5 kVA

BS4343 3 ph 4 pin 32 A

56.6 dBA @ 3 metres

25 kg

600 x 360 x 450 mm

Manual (external controls available)

7.5 kW/h

Suitable applications include:

Offices

Construction

Marquees

Hotels

Workshops

Ships

Education

Many more

 Plug and play



Nominal heating duty

Air flow (max)

Typical heated area

Power supply

Generator size

Plug type

Noise level (max)

Weight

Dimensions (L x W x H)

Control

Power consumption

20 kW

1,500 m³/h

484 m³

415 V 3 ph + E 50 Hz Run 28 A

25 kVA

BS4343 32 A 3 ph 4 pin

61 dBA @ 3 metres

32 kg

470 x 410 x 580 mm

Manual (external controls available)

11 kW/h

Suitable applications include:

Offices

Construction

Marquees

Hotels


Workshops

Ships

Education

Many more

👉 Plug and play



Nominal heating duty

Air flow (max)

Typical heated area

Power supply

Plug type

Generator size

Noise level (max)

Weight

Dimensions (L x W x H)

Duct length (max)

Duct size

Power consumption

Control

42 kW

4,500 m³/h

1,200 m³

415 V 3ph N + E 50 Hz Run 52 A

BS4343 3 ph 5 pin 63 A

50 KVA

68.7 dBA @ 3 metres

120 kg

1,360 x 630 x 950 mm

32 metres

450 mm

21.5 kW/h

Integral Thermostat (external controls available)

Suitable applications include:

Workshops

Construction

Marquees

Hotels

garages

Ships

Agricultural

Many more

👉 Plug and play



Nominal heating duty

Air flow (max)

Typical heated area

Power supply

Noise level (max)

Plug type

Weight

Dimensions (L x W x H)

Duct length (max)

Duct size

Control

Power consumption

2.8 kW

200 m³/h

67.6 m³

230 V 1ph 50 Hz Run 12.2 A

44 dBA @ 3 metres

BS1363 230 V

10.5 kg

395 x 332 x 310 mm

3 metres

100 mm

Integral thermostat

2.8 kW/h

Suitable applications include:

Workshops

Construction

Marquees

Hotels

Retail

Ships

Agricultural

Many more

👉 Plug and play

**Nominal heating duty****Air flow (max)****Typical heated area****Power supply****Noise level (max)****Plug type****Generator****Weight****Dimensions (L x W x H)****Duct length (max)****Duct size****Control****Power consumption**

9 kW

450 m³/h241 m²

415 V 3 ph + E 50 Hz Run 14 A

57 dBA @ 3 metres

BS4343 4 pin 16 A

12.5 kVA

19 kg

670 x 320 x 310 mm

3 metres

120 mm

Integral thermostat

5.8 kW/h

Suitable applications include:

Workshops

Construction

Marquees

Hotels

Retail

Ships

Agricultural

Many more

 Plug and play



Nominal heating duty

Air flow (max)

Typical heated area

Power supply

Noise level (max)

Plug type

Generator

Weight

Dimensions (L x W x H)

Duct length (max)

Duct size

Control

Power consumption

20 kW

900 m³/h

483 m³

415 V 3 ph + E 50 Hz Run 28 A

62 dBA @ 1 metre

BS4343 4 pin 32 A

25 kVA

28 kg

980 x 515 x 480 mm

5 metres

150 mm

Integral thermostat

11 kW/h

Suitable applications include:

Workshops

Construction

Marquees

Hotels

Retail

Ships

Agricultural

Many more

👉 Plug and play




Nominal heating duty
Typical heated area
Power supply
Plug type
Weight
Dimensions (L x W x H)
Control
Average power consumption

2 kW
48.3 m³
230 V 1 ph 50Hz Run 8.7 A
BS1363 230 V
3.1 kg
590 x 170 x 420 mm
Integral thermostat
2 kW/h

Suitable applications include:

Workshops	Retail
Construction	Ships
Marquees	Agricultural
Hotels	Many more

 Plug and play




Nominal heating duty
Typical heated area
Power supply
Plug type
Weight
Dimensions (L x W x H)
Control
Power consumption

2.5 kW
60.4 m³
230 V 1 ph 50 Hz Run 10.86 A
BS1363 230 V
15 kg
500 x 170 x 670 mm
Integral thermostat
2.5 kW/h

Suitable applications include:

Offices	Retail
Construction	Ships
Marquees	Agricultural
Hotels	Many more

👉 Plug and play

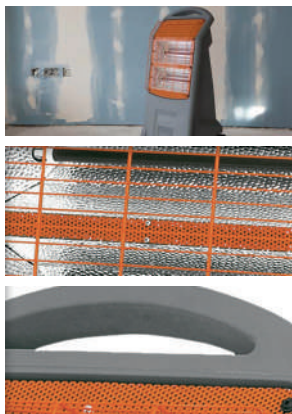

Nominal heating duty

Typical heated area

Power supply

Plug type

Weight

Dimensions (L x W x H)

Control

Power consumption

3.0 kW

72 m³

230 or 110 V 1 ph 50 Hz versions
available Run 13 or 27.2 A

BS1363 230 V or BS4343 32 A 110V

20 kg

505 x 477 x 906 mm

Manual

3 kW/h

Suitable applications include:

Workshops

Construction

Marquees


Offices


Retail

Ships

Agricultural

Many more

 Plug and play



Nominal heating duty

Typical heated area

Power supply

Plug type

Weight

Dimensions (L x W x H)

Control

Power consumption

3.0 kW

72 m³

110 V 1ph 50 Hz Run 27.2 A

BS4343 32 A 110 V

20 kg

505 x 477 x 906 mm

Manual

3 kW/h

Suitable applications include:

Workshops

Construction

Marquees

Offices

Retail

Ships

Agricultural

Many more


👉 Plug and play

Our electric heaters are supplied with plugs, three phase models may be supplied with 4 or 5 pin versions. Specific plug details are shown on each product page.

- Extension leads are available in a variety of lengths and voltages.
- DE heaters can be supplied with thermostats.
- CT heaters can be provided with 5 metre ducting (CT20 allow 3 metres only).
- Generator and distribution solutions are available for all applications.

Andrews Heat for Hire can also supply telemetry equipment to allow remote and recorded monitoring of temperatures, particularly useful in heat load tests.



**Nominal heating duty****Air flow (max)****Typical heated area****Power supply****Plug type****Noise level (max)****Weight****Dimensions (L x W x H)****Minimum flue****Duct length (max)****Duct diameter size****Control****Fuel type****Fuel consumption****Tank capacity****Hours run**

24.8kW

1,450 m³/h600 m³

230 V 1ph 50Hz Run 1.5 A

BS1363 230 V

75 dBA @ 1 metre

58 kg (98 kg fuelled)

1,250 x 490 x 690 mm

1 metre (150mm od)

8 metres

300mm

Manual (external controls available)

Gas Oil

2.4 l/h

40 litres

16 hours (single tank)

Suitable applications include:

Workshops

Construction

Marquees


Events

Workshops

Churches

Agricultural

Many more

 Integral fuel tank Easy to manoeuvre



Nominal heating duty

Air flow (max)

Typical heated area

Power supply

Plug type

Noise level (max)

Weight

Dimensions (L x W x H)

Minimum flue

Duct length (max)

Duct diameter size

Control

Fuel type

Fuel consumption

Tank capacity

65 kW

4,460 m³/h

1,625 m³

230 /110 V 1 ph 50 Hz Run 4.1/9.0 A

BS1363 13 A 230 V BS4343 16 A 110 V

72 dBA @ 1 metre

230 kg

1,580 x 730 x 1,300 mm

600 x 180 mm

24 metres

450 mm

Manual (external controls available)

Gas Oil

6.5 l/h

Separate fuel buggy/tank required

Suitable applications include:

Workshops

Construction

Marquees

Events

Sports venues

Churches

Agricultural

Many more



Dual voltage



High-capacity heating



Easy to manoeuvre



Nominal heating duty

Air flow (max)

Typical heated area

Power supply

Plug type

Noise level (max)

Weight

Dimensions (L x W x H)

Duct length (max)

Duct size

Control

Fuel type

Fuel consumption

Tank capacity

Flue size

110 kW

8,000 m³/h

2,440 m³

230/110 V 1 ph 50 Hz Run 9.2/22 A

BS4343 230 V 16 A BS4343 110 V 32 A

79 dBA @ 1 metre

350 kg

2,230 x 780 x 1,340 mm

40 metres

450 mm

Manual (external controls available)

Gas Oil

10.9 l/h

Separate fuel buggy/tank required

1 metre x 200 mm

Suitable applications include:

Workshops

Construction

Marquees

Events

Sports venues

Factories

Agricultural

Many more



Dual voltage



High-capacity heating



Easy to manoeuvre



Nominal heating duty

Air flow (max)

Typical heated area

Power supply

Plug type

Generator size

Noise level (max)

Weight

Dimensions (L x W x H)

Duct length (max)

Duct size

Control

Fuel type

Fuel consumption

Tank capacity

Flue size

200 kW

13,000 m³/h

4,204 m³

415 V 3 ph +E 50 Hz Run 10.4 A

BS4343 4 pin 3 ph 32 A

10 kVA

82 dBA @ 1 metre

428 kg

2,710 x 910 x 1,520 mm

40 metres

600 mm

Manual (external controls available)

Gas Oil

18 l/h

Separate fuel buggy/tank required

1 metre x 200 mm

Suitable applications include:

Workshops

Construction

Marquees

Events


Sports venues

Factories

Agricultural

Many more

 Dual voltage

 Easy to manoeuvre



Nominal heating duty

Air flow (max)

Typical heated area

Power supply

Plug type

Generator size

Noise level (max)

Weight

Dimensions (L x W x H)

Duct length (max)

Duct size

Control

Fuel type

Fuel consumption

Tank capacity

Flue size

200 kW

12,000 m³/h

4,108 m³

415 V 3 ph +E 50 Hz Run 7.5 A

BS4343 3 ph 4 pin 32 A

7 kVA

76.5 dBA @ 1 metre

545 kg

2,400 x 800 x 1,370 mm

40 metres

300 mm x 4 or 600 mm x 1

Manual (external controls available)

Gas Oil

18.2 l/h

Separate tank required

1 metre x 200 mm

Suitable applications include:

Workshops

Construction

Marquees

Events

Sports venues

Factories

Agricultural

Many more

 High-capacity heating



Nominal heating duty (max)

Air flow (max)

Typical heated area

Power supply

Plug type

Generator size (soft start)

Noise level (max)

Weight

Dimensions (L x W x H)

Duct length (max)

Duct size

Control

Fuel type

Fuel consumption (max)

Tank capacity

Flue size

383 kW

24,000 m³/h

8,457 m³

415 V 3 ph +E 50 Hz Run 20 A

BS4343 4 pin 3 ph 32 A

20 kVA

76.5 dBA @ 1 metre

1300 kg

3,850 x 1,200 x 2,015 mm

40 metres

600 mm x 2

Manual (external controls available)

Gas Oil

38 l/h

Separate tank required

1 metre x 300 mm

Suitable applications include:

Workshops
 Construction
 Marquees
 Events

Sports venues
 Factories
 Agricultural
 Many more

 High-capacity heating

 Soft start technology




Nominal heating duty
Typical heated area
Power supply
Plug type
Noise level (max)
Weight
Dimensions (L x W x H)
Control
Fuel type
Fuel consumption
Minimum cylinders(s)

26 kW
628 m³
230/110 V 1 ph 50 Hz Run 1.2/2.5 A
BS1363 230 V BS4343 16 A 110 V
62.3 dBA @ 1 metre
180 kg
1,550 x 560 x 1,651 mm
Integral thermostat
LPG propane only
1.86 kg/h
1 x 47 kg

Suitable applications include:

Workshops	Sports venues
Construction	Factories
Marquees	Agricultural
Events	Many more

 High-capacity heating



Nominal heating duty

Air flow (max)

Typical heated area

Power supply

Plug type

Noise level (max)

Weight

Dimensions (L x W x H)

Minimum flue

Duct length (max)

Duct diameter size

Control

Fuel type

Fuel consumption

Minimum cylinders

65 kW

4,460 m³/h

1,625 m³

230 /110 V 1ph 50 Hz Run 4.1/9.0 A

BS1363 13 A 230 V BS4343 16 A 110 V

72 dBA @ 1 metre

230 kg

1,580 x 730 x 1,300 mm

600 x 180 mm

24 metres

450 mm

Manual (external controls available)

Propane

4.6 kg/h

3 x 47 kg

Suitable applications include:

Workshops

Construction

Marquees

Events

Sports venues

Factories

Agricultural

Many more

 Dual voltage

 High-capacity heating



Nominal heating duty

Air flow

Typical heated area

Power supply

Plug type

Noise level

Weight

Dimensions (L x W x H)

Control

Fuel type

Fuel consumption

Tank capacity

Hours run

43 kW

1,050 m³/h

1,050 m³

230 or 110 V 1 ph 50 Hz versions

available Run 2/4.1 A

BS1363 230v / BS4343 16 A 110v

79 dBA @ 1 metre

37 kg (fuelled 87 kg)

930 x 560 x 615 mm

Manual (external controls available)

Gas Oil

4.6 l/h

46 litres

10 hours per tank

Suitable applications include:

Workshops


Construction

Factories

Agricultural

Garages

Many more

 Dual voltage

 Integral fuel tank



Nominal heating duty

Air flow (max)

Typical heated area

Power supply

Plug type

Noise level (max)

Weight

Dimensions (L x W x H) Control

Fuel type

Fuel consumption

Tank capacity

Hours run

69 kW

2,500 m³/h

2,500 m³

230 or 110 V 1 ph 50 Hz Run 2.8/5.62

A BS1363 230 V / BS4343 16 A 110 V

71 dBA @ 1 metre

58 kg (fuelled 123 kg)

1,200 x 555 x 860 mm

Manual (external controls available)

Gas Oil

5.5 l/h

65 litres

12 hours per tank

Suitable applications include:

Workshops

Construction

Factories


Agricultural

Garages

Many more

 Dual voltage

 Integral fuel tank

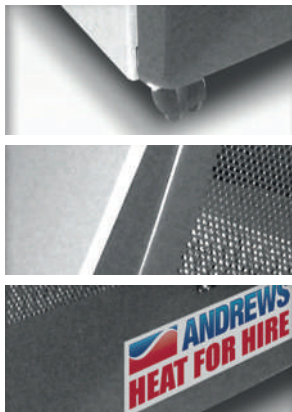

Nominal heating duty (max)

Typical heated area

Weight

Dimensions (L x W x H)

Control

Fuel type

Fuel consumption

Cylinder

Max. operating pressure

3.0 kW

72.5 m³

14 kg

420 x 340 x 700 mm

Manual

LPG butane

0.219 kg/h

15 kg

0.28 bar

Atmosphere analyser safety as
standard

Suitable applications include:

Workshops

Construction

Factories

Agricultural

Garages

Many more

 No power required



Nominal heating duty
Air flow
Typical heated area
Power supply
Plug type
Noise level
Weight
Dimensions (L x W x H)
Control
Fuel type
Fuel consumption
Minimum cylinder(s)
Max. operating pressure

38.6 kW
750 m³/h
923 m³
230/110 V 1 ph 50 Hz Run 0.4/0.8 A
BS1363 230 V BS4343 16 A 110 V
72 dBA @ 1 metre
15.5 kg
610 x 372 x 480 mm
Manual
LPG Propane only
1.15 kg/h
2 x 47 kg
1.5 bar

Suitable applications include:

Workshops
Construction
Factories
Agricultural
Garages
Many more

 Dual voltage



ANDREWS
T FOR HIRE



Nominal heating duty

Air flow

Typical heated area

Power supply

Plug type

Noise level

Weight

Dimensions (L x W x H)

Control

Fuel type

Fuel consumption

Minimum cylinder(s)

Max. operating pressure

82.43 kW

2,190 m³/h

1,930 m³

230/110 V 1 ph 50 Hz Run 0.65/1.3 A

BS1363 230 V BS4343 16 A 110V

77 dBA @ 1 metre

25 kg

878 x 450 x 579 mm

Manual

LPG Propane only

6.4 kg/h

3 x 47 kg

2 bar

Suitable applications include:

Workshops

Construction

Factories

Agricultural

Garages

Many more

 Dual voltage

The following pages provide details of our range of accessories and fuel supply alternatives which complement our range of portable heaters and provide everything you will need for a complete heating solution.

- Fully bunded fuel oil tanks
- Fuel oil delivery and monitoring
- LPG - bottled gas delivery service
- Gas and Oil connection pipework
- Ducting for supply or recirculation
- Special air diffusers
- Adaptors, T-pieces and Y pieces
- Thermostats
- Electrical distribution boards
- Generators
- Electrical extension cables
- Transformers

Tips for portable gas heaters

Small catalytic gas heaters require a single 15kg bottle of butane gas. Medium units such as the G30 should be connected to two 47kg propane gas cylinders. Larger units such as the G80, must be connected to at least three 47kg propane gas cylinders.

When using too few bottles, or bottles that are too small, the heat output of the unit is adversely affected and this can result in the interruption of the gas supply to the unit. For large gas uses and at low temperatures (below +5 °C) Andrews recommend connecting multiple cylinders with a cylinder pairing set and not placing the cylinders in areas that are too cold.

The use and storage of bottled gas can be hazardous and it is vital that careful consideration is given to the application and storage location for gas cylinders. All direct fired heaters require permanent ventilation to the outside atmosphere and it's recommended to allow a minimum of 6.5cm² for every 293W of heat input.

A free site survey by an Andrews heating specialist will help you work out exactly what model and set-up is right for your location and application. For health and safety reasons, it is essential that you choose and operate the right type of heater for your location and application. We will be pleased to advise you on the safest and most appropriate heater(s) to use.





90 LITRES

Capacity

Dimensions (L x W x H)

Dry weight

Full weight

Suitability

90 Litres

600 x 500 x 1,000 mm

57 kg

147 kg

Diesel only

105 LITRES

Capacity

Dimensions (L x W x H)

Dry weight

Full weight

Suitability

105 Litres

650 x 543 x 962 mm

53 kg

137 kg

Diesel only

*Typical weight and dimensions - some versions may vary.



Capacity

Dimensions (L x W x H)

Dry weight

Full weight

Capacity

Dimensions (L x W x H)

Dry weight

Full weight

Capacity

Dimensions (L x W x H)

Dry weight

Full weight

Capacity

Dimensions (L x W x H)

Dry weight

Full weight

Capacity

Dimensions (L x W x H)

Dry weight

Full weight

Capacity

*Typical weight and dimensions - some versions may vary.

1,000 Litres

1,610 x 1,240 x 1,290 mm

449 kg

1,449 kg

2,000 Litres

2,225 x 1,250 x 1,540 mm

672 kg

2,672 kg

2,800 Litres

2,585 x 1,200 x 1,525 mm

900 kg

3,700 kg

3,000 Litres

2,470 x 1,245 x 1,845 mm

1,000 kg

4,000 kg

6,000 Litres

3,750 x 2,300 x 2,500 mm

11,915 kg

2,615 kg

10,000 Litres

Specification available upon request

Most indirect fired heater applications require the use of flexible ducting to direct the heated air to where it is needed.

Indirect heaters are designed to allow sufficient air flow through the machine to keep the operating temperature of the combustion chamber within the designed operating temperature range, with the recommended diameter and length of ducting fitted. Exceeding the recommendations reduces the air flow and performance of the heater. It is therefore important that ducting length and diameter are calculated accurately. Always keep ducting runs as straight as possible, bends will increase resistance. When ducts are split to direct warm air into separate areas, ensure the overall surface area of the ducting is not reduced where practical.

For example; A heater with a 600mm (24") outlet, should not be split into 2 x 300mm (12") ducts.

Ducting Size	600 mm (24")	450mm (18")	300 mm (12")
600 mm (24")	1	2	4
450 mm (18")	n/a	1	2
300 mm (12")	n/a	n/a	1

Ducting runs which require splitting to gain access to different areas should be run as far as possible in the same size duct as the heater outlet before fitting the splitter. The greater diameter the duct, the less friction loss / resistance there will be.



To complement our range of heating, cooling and ventilation equipment, Andrews Sykes offer a vast range of flexible ducting and accessories to suit every application. Standard diameters from 150mm to 600mm in 8 metre lengths can be coupled together to deliver airflow to the required location.

Heavy duty ducting suitable for negative pressure extraction applications or positive pressure air supply applications.

- Use minimum length of ducting to maintain highest performance
- Keep all ducting as straight and taut as possible, avoid tight bends
- Duct outlets should be carefully positioned to prevent injury from airborne particles
- Secure duct connections to prevent leakage
- Use inlet guards where there is a chance litter may be drawn into the ducting

**Other accessories include:**

- Duct adaptors & reducers
- Y pieces
- Connecting collars
- Re-circulation adaptors
- Fixing clips
- Air diffuser boxes



**THERMOSTAT T16**

Power supply	110 v or 230 v 1ph 50hz
Max current	5 A
Weight	1 kg
Dimensions (L x W x H)	106 x 83 x 200 mm
Operation	Automatic

**THERMOSTAT T32**

Power supply	415 v 3ph 50hz
Max current	32 A
Weight	2 kg
Dimensions (L x W x H)	106 x 83 x 200 mm
Operation	Automatic



Along with our extensive range of heaters, dehumidifiers, air conditioners, ventilators, chillers and boilers, Andrews can provide a complete hire solution to include generators and power distribution.

We can supply generators from 3 kVa up to multi kW packages, in a variety of voltages. Generators are often fully silenced and complete with fuel tanks. Our electrical distribution equipment includes distribution boards, transformers and cabling.

Andrews supplies the latest in power rental equipment to meet all your requirements. We deliver to you fast from our nationwide depots and offer a genuine 24/7/365 service. Our experienced service team can help you calculate which distribution system is best for your power needs.

Delivering instant heat and hot water, wherever and whenever they're needed.

Whether it's support during maintenance, refits and new build or an emergency following a breakdown, our fully mobile boilers are the most advanced and efficient available. We also guarantee fast delivery and installation from our depots nationwide: a genuine 24/7 service, 365 days' a year.

Our portable oil, gas and electric boilers can be coupled to any existing heating and hot water system quickly. All LPHW (Low Pressure Hot Water) boilers deliver large volumes of hot water on demand: for indoor and outdoor locations, at any time of the year, for a range of commercial, industrial and leisure applications.

The range extends from 22 kW to multi-megawatt packages, with every unit featuring high specifications as standard.

We also offer customers medium pressure hot water (MPHW) boilers which are perfect for overcoming potential heat loss on long run applications. These boilers are common among large hot water distribution systems, such as district heating, and where process applications require higher temperatures than can be achieved with traditional low pressure hot water systems.

Our steam boilers are typically deployed in industrial environments - such as paper mills and factories - and can be used for power generation, running machinery or operating turbines.

- Natural gas and oil fired boilers: the UK's most modern and efficient boiler hire fleet.
- 24/7 boiler hire, service and sales support UK-wide - 365 days a year.
- We offer a 4 hour response.
- Environmentally friendly, energy efficient equipment.
- For planned support, disaster recovery and business continuity.
- Installation, commissioning and service by qualified gas safe engineers.



Typical Air Handling Setup**Boiler****Air Handling Unit
(internal/external)**


The Andrews package boiler system provides a fast and efficient solution to a wide range of heating and domestic hot water applications. All boilers in our fleet can be coupled with a large range of fan coils and air handling units - providing temperature-controlled heated air for a multitude of applications. Andrews offer an extensive range of electric, oil fired and natural gas fired boilers.

We also stock a large range of ancillaries and accessories which include air handlers, fan coils, pressurisation units, expansion vessels, temporary pipe work, heat exchangers, fluid pump sets, generators and fuel tanks. Additionally, we provide a comprehensive fuel management system to ensure your boiler remains fully operational throughout the hire period. All units and accessories are available 24/7/365 throughout our nationwide depot network.

Our boilers are available in the following capacities: 22kW, 36kW, 80kW, 100kW, 250kW, 300kW, 375kW, 500kW, 1,250kW and 1,500kW units. All of our temporary boilers can be coupled together in series or parallel to provide multi-megawatt packages. These can be provided with twin heat exchangers to supply individual thermostatically controlled central heating and domestic hot water at the same time.


MPHW units available from 500kW to 1,500kW and steam units from 1,000 kg/h to 3,000 kg/h on request.

Process heating

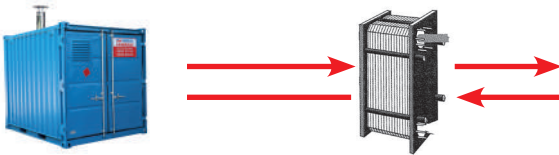

This system is often used where a product requires heating but due to the nature of the product it must not come into contact with the boiler circuit. To satisfy this requirement if the boiler is used in conjunction with a heat exchanger, a plate heat exchanger is preferred for this type of application. This will keep the boiler flow and the process flow separate.

Breakdown and recovery

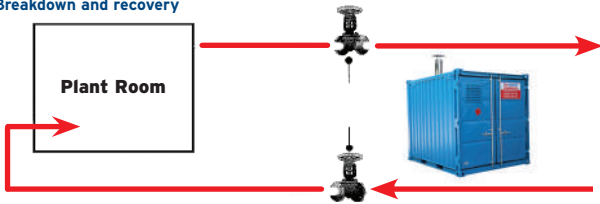

The Andrews packaged boiler may be used to maintain hot water and heating flow to existing systems. In the event of planned maintenance to existing plant or fast on site temporary installation during breakdown situations.



Nominal heating duty

Power supply

Plug type

Noise level (max)

Weight

Dimensions (L x W x H)

Fuel type

Average power consumption

22 kW

415 V 3ph N+E Run 31 A

BS4343 5 pin 32 A

35 dBA / 48 LWA @ 10 metres

50 Kg

600 x 550 x 1,100 mm

Electric

9.6 kW/h

Suitable applications include:

Construction


Retail

Food & beverage

Warehouses

Factories

Many more

 Energy efficient

ELECTRIC BOILER - 22 KW WITH HEAT EXCHANGER

ANDREWS
BOILERS



Nominal heating duty
Power supply
Plug type
Noise level (max)
Weight
Dimensions (L x W x H)
Fuel type
Average power consumption

22 KW
415 V 3ph N+E Run 31 A
BS4343 5 pin 32 A
35 dBA / 48 LWA @ 10 metres
49 Kg
630 x 650 x 1,072 mm
Electric
9.6kW/h

Suitable applications include:

Construction	Factories
Retail	Many more
Food & beverage	
Warehouses	

 Energy efficient



Nominal heating duty

Power supply

Plug type

Noise level (max)

Weight

Dimensions (L x W x H)

Fuel type

Average power consumption

36 kW

415 V 3ph N+E Run 52 A

BS4343 5 pin 63 A

35 dBA @ 10 metres

60 Kg

600 x 550 x 1,100 mm

Electric

16 kW/h

Suitable applications include:

Construction

Retail

Food & beverage

Warehouses

Factories

Many more

 Energy efficient



Nominal heating duty

Power supply

Plug type

Noise level

Weight

Dimensions (L x W x H)

Fuel type

Average power consumption

Water connections

Temperature range

80 kW

415 V 3ph N+E Run 117 A

EN6309-1 5 pin 125 A

30 dBA @ 10 metres / 42 LWA @ 10 metres

1,030 Kg

2,200 x 1,570 x 2,420 mm

Electric

48.5 kW/h

1" BSP stortz coupling

25 / 90 °C

Suitable applications include:

Construction

Retail

Food & beverage


Warehouses

Factories

Events

Healthcare

Many more

 Energy efficient



Nominal heating duty
Power supply
Plug type
Noise level (max)
Weight
Dimensions (L x W x H)
Fuel type
Max fuel consumption
LPHW connections
DHW connections
Natural gas connections
Average power consumption

100 kW
230 V 1 ph N+E 50 Hz Run 10 A
BS4343 16 A
45 dBA / 58 LWA @ 10 metres
980 kg
2,200 x 1,550 x 2,400 mm
Gas Oil/Natural Gas
12.5 l/h Gas Oil
25 mm (1") storz coupling
25 mm (1") storz coupling
3/4" BSP coupling
2.3 kW/h

Suitable applications include:

Construction	Factories
Retail	Events
Food & beverage	Healthcare
Warehouses	Many more

🔒 Lockable & secure container

🔥 High-capacity heating



Nominal heating duty

Power supply

Plug type

Noise level (max)

Weight

Dimensions (L x W x H)

Fuel type

Max fuel consumption

LPHW connections

DHW connections

DHW recirculation connections

Natural gas connections

250 kW

230 V 1 ph N+E 50 Hz Run 10 A

BS4343 16 A

45 dBA / 58 LWA @ 10 metres

2,000 kg

3,000 x 2,400 x 2,600 mm

Gas Oil/Natural Gas

31 l/h Gas Oil

50 mm (2") storz coupling

50 mm (2") storz coupling

25 mm (1") storz coupling

1 1/4" BSP coupling

Suitable applications include:

Construction

Retail

Food & beverage

Warehouses

Factories

Events

Healthcare

Many more

 Lockable & secure container

 High-capacity heating



Nominal heating duty
Power supply
Plug type
Noise level (max)
Weight
Dimensions (L x W x H)
Fuel type
Max fuel consumption
LPHW connections
Average power consumption

300 kW
240 V 1 ph N+E 50 Hz Run 14 A
BS4343 16 amp
46 dBA / 60 LWA @ 10 metres
2,600 kg
3,000 x 2,400 x 2,600 mm
Gas Oil/ Natural gas
27 l/h Gas Oil
50 mm (2") storz coupling
3.3 kW/h

Suitable applications include:

Construction	Factories
Retail	Events
Food & beverage	Healthcare
Warehouses	Many more

 Lockable & secure container

 High-capacity heating



Nominal heating duty
Power supply
Noise level (max)
Weight
Dimensions (L x W x H)
Plug type
Average power consumption
Fuel Consumption
Fuel type
DHW connections (recirculation)
Control
DHW connections (flow / return)
LPHW connections (flow / return)

375 kW 1279500 btu
 415 V 3 ph N+E 50 Hz Run 10 A
 45 dBA / 58 LWA @ 10 metres
 2,550 kg
 3,000 x 2,200 x 2,700 mm
 BS4343 5 pin 16 A
 2.4 kW/h
 44 l/hr
 Gas Oil only
 25 mm / 1" stortz connector
 Automatic thermostat
 50 mm / 2" stortz connector
 75 mm / 3" stortz connector

Suitable applications include:

Construction	Factories
Retail	Events
Food & beverage	Healthcare
Warehouses	Many more

-  Lockable & secure container
-  High-capacity heating


Nominal heating duty
Power supply
Plug type
Noise level (max)
Weight
Dimensions (L x W x H)
Fuel type
Max fuel consumption
LPHW connections
DHW connections
DHW recirculation connections
Natural gas connections

500 kW

415 V 3ph N+E 50 Hz Run 16A

BS4343 5 pin 32 A

45 dBA / 58 LWA @ 10 metres

4,000 kg

3,000 x 2,400 x 2,600 mm

Gas Oil/Natural Gas

42 l/h Gas Oil

80 mm (3") storz coupling

50 mm (2") storz coupling

25 mm (1") storz coupling

2" BSP coupling

Suitable applications include:

Construction

Retail

Food & beverage

Warehouses

Factories


Events

Healthcare

Many more

 Lockable & secure container

 High-capacity heating



Nominal heating duty
Dimensions (L x W x H)

Weight

Noise level (max)

Power supply

Plug type

Control

Fuel type

Fuel consumption (max)

LPHW connections (flow/ return)

Power consumption

1,250 kW
6,058 x 2,438 x 2,591 mm (without
flue)

7,500 kg

48 dBA / 62 LWA @ 10 metres

415 V 3 ph N+E 50 Hz Run 10 A

B54343 5 pin 32 amp

Automatic thermostat

Gas Oil

100 l/h

100 mm DN100 PN16 flange

4.1 kW/h

Suitable applications include:

Construction

Retail

Food & beverage

Warehouses

Factories

Events

Healthcare

Many more

 Lockable & secure container

 High-capacity heating



Nominal heating duty
Dimensions (L x W x H)

Weight

Noise level (max)

Power supply

Plug type

Control

Fuel type

Fuel consumption (max)

LPHW connections (flow/ return)

Power consumption

1,500 kW

6,058 x 2,438 x 2,900 mm (without flue)

8,900 kg

47 dBA / 61 LWA @ 10 metres

415 V 3 ph N+E 50 Hz Run 27 A

BS4343 5 pin 32 amp

Automatic thermostat

Gas Oil

172.5 l/h

100 mm DN100 PN16 Flange

11.2kW/h

Suitable applications include:

Construction

Retail

Food & beverage

Warehouses

Factories

Events

Healthcare

Many more

 Lockable & secure container

 High-capacity heating



Nominal heating duty

Power supply

Plug type

Noise level

Weight

Internal fuel tank

Dimensions (L x W x H)

Fuel type

Max fuel consumption

Hours run

LPHW connections

Working temperature (max)

100 kW

240 V 1 ph N+E 50 Hz Run 7 A

BS4343 16 amp 3 pin

60 dBA @ 3 metres

78 LWA @ 3 metres

722 kg (Without fuel)

98 litres

2,700 x 1,600 x 2,000 mm

Gas Oil

9 l/h

11 hours per tank

28 mm (1") stortz coupling

80°C

Suitable applications include:

Construction

Retail

Food & beverage

Warehouses

Factories

Events

Healthcare

Many more

 Road legal

 High-capacity heating

Hoses and Pipework



Along with our boilers, we also supply flexible hoses, manifolds, valve and coupling which help complete the temporary installation and allow the units to be connected to existing systems,

or onto air handlers and heat exchangers. Our range of flexible hoses are usually supplied in 6 metre lengths and are fitted with Storz quick release couplings. The hoses are generally rated for use up to 100°C and pressures of up to 10 Bar. Specialist WRAS approved hoses are also available for domestic hot water applications.

Heat Exchangers

In certain applications, it is advisable to use a heat exchanger between the boiler and the system flow. This may be due to hygiene, system pressure or the need to heat sensitive liquids, oils or aggressive material. In such cases, we offer a wide range of plate heat exchangers for hire that suit most applications and capacities.





Fuel Tanks

When our boilers are to be run on fuel oil, we offer a wide range of fuel tanks for hire and along with a full fuel management service to ensure the boiler is kept running 24 /7. Our fuel tanks are available in capacities from 1,000 to 10,000 litres, see page 109.

Air Handlers

For applications where boilers are used to provide heating, we offer a range of air handlers and fan coils for hire. They can be connected to a boiler via flexible hoses and provide high volumes of warm air in capacities from 15kW to 600kW, free blowing or via flexible ducting, see page 62 to 71.



Tackling high moisture problems with reliable refrigerant and desiccant dryers. If you're experiencing moisture problems in a room or building, our powerful and reliable dehumidifiers can handle up to 1,500 litres dehumidification capacity a day, delivering high levels of drying power. Typical applications include building and construction, offices, industry and manufacturing, agriculture, warehousing and logistics, and even domestic homes.

Two types are available:

Refrigerant - using an evaporator and condenser, these are the most commonly used in the British climate, providing keep-dry areas up to 9,000m³ and dry out areas up to 4,500m³.

Desiccant - using moisture-absorbing materials like silica gel, these units can handle up to 1,550 litres drying capacity a day, providing keep-dry areas up to 14,000m³ and dry out areas up to 7,000m³. These units are for when very low relative humidity is needed, if work is being carried out at extremely low temperatures, a low dew point is essential, or for when the unit has to be ducted into the area that needs drying.

With free site surveys and friendly customer service on **0800 211 611**, our specialists can help you decide which unit is best for you.

Diagram of refrigerant principle





Diagram of desiccant principle



The operation of refrigerant dryers

Refrigerant dryers cool air intake considerably by means of an evaporator section in a closed refrigeration system. As a result of this cooling, the relative humidity of the air over the evaporator rises to above 100% and water vapour condenses. This water (or condensation) is either drained into a reservoir or through a hose to a drain, water container or a suitable outside location. The heat generated in the cooling system condenser is used to warm the returned air to a temperature above that of the original intake. Each time the room air is passed through the dryer a quantity of moisture is removed from the air, therefore the humidity within the room is reduced. Refrigerant dryers are typically positioned within the room to be dried and require little attention whilst in operation.

The operation of desiccant dryers

A desiccant dryer uses the hygroscopic properties of moisture-absorption materials such as silica gel or lithium chloride. These materials are impregnated within a rotating ceramic wheel, over which the humid air from the room is blown. The hygroscopic material absorbs a large percentage of the moisture from the air, therefore reducing the humidity in the area. The wheel is left very wet, it then continues to rotate slowly and the section which is saturated with moisture is heated with an electric heater, to vaporise the water. This warm and very humid air is then expelled outside through a length of flexible ducting. As well as being able to place a desiccant unit within a room that is to be dried, desiccant dryers are often used in applications where it is not possible to position a dryer, such as hazardous areas or areas with limited access such as pipes and tanks.

Applications of refrigerant and desiccant dryers

Refrigerant dryers are most commonly used in the British climate. Desiccant dryers tend to be only used in the following situations:

- a very low relative humidity is required (< 40%)
- the work is being carried out at extremely low temperatures (< -10°C)
- a low dew point is essential (for example tank-coating)
- the unit has to be ducted into the area that needs drying

A refrigerant dryer uses about one third of the energy of a similar desiccant dryer, therefore the obvious advantage (especially on site) is that it requires much less electricity so that running costs are usually reduced. A desiccant dryer is more efficient than a refrigerant dryer at about -5°C.

Typical applications include:

- drying out buildings during construction/finishing
- drying out after a fire or flood
- storage of delicate products that are moisture sensitive
- keeping electrical switch rooms dry
- equipment drying rooms on construction sites, outdoor activity centres, fire stations, etc
- the drying out of pipework and tanks prior to repainting/coating

Fire and water damage

In the case of fire and water damage, immediate professional action is essential to avoid further damage. Andrews hires dryers, heaters and fans to reduce relative humidity and to ventilate polluted air. Corrosion (HCL) can be stopped; buildings, furniture and inventory can be saved and thus restoration costs can be minimized.

Building drying

The most important reason for using building dryers is to minimize the total building time by creating the perfect conditions for painting, plastering, finishing floors and ceilings, wall-paper, etc. Andrews has the right dryer available whether you need a building dryer for a house, a cellar, a safe storage or complete utility.

Humidity control during storage

Increasingly, higher demands are made upon the relative humidity standards for all storage including agricultural products, electronic components, sheet steel, food, paper products, powders, objects d'art, antiques, etc. The list is almost endless.

Typical relative humidity conditions

Material	% R.H.	Material	% R.H.
Nuts	60-65	Steel	45
Chocolate	40-50	Electronics	55
Onions	65-70	Switch Rooms	60
Furniture	50-55	Paper	55-65
Flower bulbs	70-75	Artwork	55

To avoid mould the relative humidity has to be maintained below 70% R.H.

Dehumidification with an Andrews refrigerant building dryer is up to 75% cheaper than using heating in combination with ventilation to dry a room.

A combination of equipment can speed the drying process up, the dehumidifier removes the moisture from the air, whilst heaters and fans accelerates the process by circulating warm air throughout the affected area allowing the dehumidifier to be more efficient.



Calculation and selection of the correct dehumidifier or dryer

To correctly decide upon the most efficient way of drying an area, many factors need to be considered: temperature, materials, relative humidity and drying time. This calculation is best left to the experts at Andrews who, armed with a hygrometer and psychrometric chart, will give you the very best advice - free of charge - on how to use our units.

Basic 'rule of thumb' sizing Refrigerant units

These are usually sized taking a typical RH of 75% at an air temperature of 20°C, the performance of the unit will vary greatly as the temperature and RH rises or falls. Typically the units are shown to be able to keep an area in cubic metres dry, based on the above conditions. The dry out area is usually around 50% of this as the area is assumed to be already wet and this moisture needs to be removed.

Desiccant units

In general, a desiccant unit is suitable to dehumidify a room with a volume two times bigger than the dry air volume produced by the dryer. A desiccant dryer with a dry air volume of 1,600 m³/hr is suitable to dry a room of approximately 3,200 m³.

Installation of a dehumidifier

Before the installation of a dehumidifier, the room to be dried has to be sealed as well as possible. This means the room's windows and doors are kept closed and gaps and ventilation holes are covered so that humid air is prevented from flowing inside from the outside. Plastic covers are suitable for sealing a room - If one dryer is to be used, it should be positioned in the middle of the room. For larger rooms, where more dryers are used, the total room should be divided into as many equal sections as dryers to be used. A dryer is installed in the middle of each section to ensure perfect air circulation. The dryer has to be positioned so it can blow dry air without obstruction, and its air inlet grill remains clear. If dryers are used in conjunction with heaters (electrical or indirect fired), make sure hot air is not blown in the direction of the dryers. The condensation from the dryer can be caught in a container or a hose can be used to drain the condensation to outside or to a drain. In this case, the water has to be piped off vertically otherwise leakages will occur. Larger Andrews dryers remove

condensation by means of a condensation pump - a new development in dehumidification technology. This pump allows the condensation to be easily pumped upwards through a window or down to an outside drain. Due to this new development, it is no longer necessary to empty and to check the waterbuckets during weekends and holidays, for example.

Faster drying

For a faster drying process, dryers can be installed together with Andrews ventilation fans. The increased air circulation results in faster moisture evaporation, minimising the danger of shrink damage from drying out too fast. In some cases, the addition of indirect or electrical heaters may be recommended.

Accessories

- Humidistats, to turn the units on and off automatically
- Automatic timer controllers
- Condensate pumps
- Flexible ducting, which is available in various lengths and diameters
- Electrical extension leads are available in a variety of lengths and voltages
- Tiny tag remote humidity loggers
- Condensate tubing
- Condensate collection containers
- Transformers and distribution boards

Andrews Dehumidification Hire also supply telemetry equipment to allow remote and recorded monitoring of humidity and temperature.





Extraction rate (max)
Nominal extraction duty at 75% RH @ 20°C
Air flow (max)
Keep dry area (typical)
Dry out area (typical)
Power supply
Plug type
Noise level (max)
Weight
Dimensions (L x W x H)
Control
Average power consumption

55 litres/24hr
 34 litres/24hr
 380 m³/h
 748 m³
 374 m³
 230/110 V 1 ph 50 Hz Run 4.1/8.2 A
 BS1363 230 V BS4343 16 A 110 V
 57 dBA @ 3 metres
 37 kg
 363 x 363 x 805 mm
 Manual (humidistat option)
 707 W/h

Suitable applications include:

Construction	Agricultural
Art galleries	Archives
Flood recovery	Industrial
Warehouse	Many more

 Dual voltage




Extraction rate (max)
Nominal extraction duty at 75% RH @ 20°C
Air flow (max)
Keep dry area (typical)
Dry out area (typical)
Power supply
Plug type
Noise level (max)
Weight
Dimensions (L x W x H)
Control
Average power consumption

75 litres/24hr
 37 litres/24hr
 420 m³/h
 814 m³
 407 m³
 230/110 V 1 ph 50 Hz Run 5.7/11.9
 BS1363 230v BS4343 16 A 110v
 53 dBA @ 3 metres
 48 kg
 510 x 491 x 920 mm
 Manual (humidistat option)
 984 W/h

Suitable applications include:

Construction	Agricultural
Art galleries	Archives
Flood recovery	Industrial
Warehouse	Many more

 Dual voltage



Extraction rate (max)
Nominal extraction duty at 75% RH @ 20°C
Air flow (max)
Keep dry area (typical)
Dry out area (typical)
Power supply
Plug type
Noise level (max)
Weight
Dimensions (L x W x H)
Control
Average power consumption

70 litres/24hr
34 litres/24hr
480 m³/h
748 m³
374 m³
230/110 V 1 ph 50 Hz Run 4.1/8.2 A
BS1363 230 V BS4343 16 A 110 V
57 dBA @ 3 metres
59 kg
940 x 630 x 1,110 mm
Manual (humidistat option)
707 W/h

Suitable applications include:

Construction	Agricultural
Art galleries	Archives
Flood recovery	Industrial
Warehouse	Many more

 Dual voltage



Extraction rate (max)
Nominal extraction duty at 75% RH @ 20°C
Air flow (max)
Keep dry area (typical)
Dry out area (typical)
Power supply
Plug type
Noise level (max)
Weight
Dimensions (L x W x H)
Control
Average power consumption

275 litres/24hr
 150 litres/24hr
 2,200 m³/h
 3,300 m³
 1,650 m³
 415 V 3 ph 50 Hz Run 8 A
 BS4343 16 A 5 pin
 63.83 dBA @ 1 metre
 130 kg
 660 x 660 x 1,313 mm
 Manual (humidistat option)
 2.4 kW/h

Suitable applications include:

Construction	Agricultural
Art galleries	Archives
Flood recovery	Industrial
Warehouse	Many more

 High performance



Extraction rate (max)
Nominal extraction duty at 75% RH @ 20°C
Air flow (max)
Keep dry area (typical)
Dry out area (typical)
Power supply
Plug type
Noise level (max)
Weight
Dimensions (L x W x H)
Control
Average power consumption

1,148 litres/24hr
 600 litres/24hr
 9,000 m³/h
 13,200 m³
 6,600 m³
 415 V 3 ph N+E 50 Hz Run 18 A
 BS4343 32 A 5 pin
 63 dBA @ 1 metre
 497 kg
 2,100 x 1,400 x 1,800 mm
 Manual (humidistat option)
 5.6 kW/h

Suitable applications include:

Construction	Agricultural
Art galleries	Archives
Flood recovery	Industrial
Warehouse	Many more

 High performance



Extraction rate (max)
Nominal extraction duty at 75% RH @ 20°C
Air flow (max)
Keep dry area (typical)
Dry out area (typical)
Power supply
Plug type
Generator size
Duct length
Noise level (max)
Weight
Dimensions (L x W x H)
Control
Average power consumption
Duct diameters

18 litres/24hr
 12 litres/24hr
 190 m³/h
 264 m³
 132 m³
 230 or 110 V 1 ph 50 Hz Run 11 A
 BS1363 230 V 5A
 3 kVA
 5 metres
 56 dBA @ 1 metre
 12 kg
 314 x 245 x 530 mm
 Manual (humidistat option)
 862 W/h
 Wet out 80 mm, Dry out 100 mm,
 Process in 100 mm

Suitable applications include:

Construction	Agricultural
Art galleries	Archives
Flood recovery	Industrial
Warehouse	Many more

 Works in low ambient temperatures



Extraction rate (max)
Nominal extraction duty at 75% RH @ 20°C
Air flow (max)
Keep dry area (typical)
Dry out area (typical)
Power supply
Plug type
Generator size
Duct length
Noise level (max)
Weight
Dimensions (L x W x H)
Control
Average power consumption
Duct diameters

55 litres/24hr
33 litres/24hr
160 m³/h
726 m³
363 m³
110 V 1 ph 50 Hz Run 11.5 A
BS4343 110 V 32 A
3 kVA
5 metres
66 dBA @ 1 metre
30 kg
550 x 460 x 700 mm
Manual (humidistat option)
2.1 kW/h
Wet out 80 mm, Dry out 100 mm,
Process in 125 mm

Suitable applications include:

Construction	Agricultural
Art galleries	Archives
Flood recovery	Industrial
Warehouse	Many more

 Works in low ambient temperatures



Extraction rate (max)
Nominal extraction duty at 75% RH @ 20°C
Air flow (max)
Keep dry area (typical)
Dry out area (typical)
Power supply
Plug type
Generator size
Duct length (max)
Noise level (max)
Weight
Dimensions (L x W x H)
Control
Average power consumption
Duct diameters

450 litres/24hr
 300 litres/24hr
 2,000 m³/h
 6,600 m³
 3,300 m³
 415 V 3 ph N+E 50 Hz Run 28.5 A
 BS4343 5 pin 32 A
 26 kVA
 40 metres
 82.75 dBA @ 1 metre
 225 kg
 1,290 x 890 x 1,050 mm
 Manual (humidistat option)
 8.8 kW/h
 Process in 300 mm , Dry out 300
 mm, Wet out 150 , Regeneration
 150 mm

Suitable applications include:

Construction	Agricultural
Pharmaceutical	Tank drying
Flood recovery	Industrial
Warehouse	Many more

 Works in low ambient temperatures



Extraction rate (max)
Nominal extraction duty at 60% RH @ 20°C
Air flow (max)
Keep dry area (typical)
Dry out area (typical)
Power supply
Plug type
Generator size
Duct length (max)
Noise level (max)
Weight
Dimensions (L x W x H)
Control
Average power consumption
Duct diameters

480 litres/24hr
 310 litres/24hr
 2,200 m³/h
 7,000 m³
 3,500 m³
 415 V 3 ph N+E 50 Hz Run 24A
 BS4343 5 pin 32 A
 22 kVA
 40 metres
 70 dBA / 79 lWA @ 1 metre
 315 kg
 1,326 x 1,210 x 1,510 mm
 Manual or Auto (humidistat mounted)
 7.1 kW/h
 Process in 300 mm, Dry out 300 mm, Wet out 150mm, Regeneration air in 150 mm

Suitable applications include:

Construction	Agricultural
Pharmaceutical	Tank drying
Flood recovery	Industrial
Warehouse	Many more

 Works in low ambient temperatures



Extraction rate (max)
Nominal extraction duty at 75% RH @ 20°C
Air flow (max)
Keep dry area (typical)
Dry out area (typical)
Power supply
Plug type
Generator size
Duct length (max)
Noise level (max)
Weight
Dimensions (L x W x H)
Control
Average power consumption
Duct diameters

1,550 litres/24hr
 936 litres/24hr
 6,000 m³/h
 20,600 m³
 10,300 m³
 415 V 3 ph N+E 50 Hz Run 76.5 A
 BS4343 5 pin 125 A
 70 kVA
 48 metres
 94 dBA @ 3 metres
 1,400 kg
 2,790 x 1,700 x 2,130 mm
 Manual (humidistat option)
 23 kW/h
 Wet out 300 mm, Dry out 600 mm,
 Process in 600 mm, Regeneration
 300 mm

Suitable applications include:

Construction	Agricultural
Pharmaceutical	Tank drying
Flood recovery	Industrial
Warehouse	Many more

 Works in low ambient temperatures

At Andrews, we understand the importance of adequate air circulation which is why we offer our customers a full range of cooling, extraction and ventilation fans. Our equipment ensures that confined spaces and hazardous working environments are safe from contaminants and that fresh air is circulated throughout a specific application. It's not uncommon that two high capacity industrial fans are used simultaneously during a project - one to remove dangerous fumes or gases and the other to replace the affected area with safe, clean air.

As far as air extraction is concerned, it is imperative that enough openings are present within the area in which your fan is installed. We have genuine expertise of virtually every type of ventilation project which is why we offer such a broad range of equipment to suit requirements of any nature. We are constantly proposing ventilation hire packages for tunnels, sewers and similarly restricted environments where the availability of clean air is limited.

While effective fume and dust extraction is of critical importance in the above scenarios, it is just as important to take steps to ensure there is sufficient fresh air ventilation to replace what has been removed - particularly when workmen are on site.

Our fans are frequently deployed to assist specialist processes, whether that be welding, tank cleaning, sewage work, excavation, painting or even demolition. Additionally, our fans are also suitable for the temporary storage of agricultural products and livestock.

When warm temperatures strike, it is very common that our free blowing fans are positioned in exhibition centres, classrooms, exam halls and meeting rooms, providing comfort cooling to those inside.

The free-blowing fans are also excellent for creating cool tents, parties, exhibitions, sports halls, theatres, meeting rooms, canteens, offices, etc. (On average, the content of a house has to be refreshed four times an hour). The following table shows the most common ventilation rates and standards:

Ventilation rates per hour			
Type of space	Ventilation Rates	Type of space	Ventilation Rates
Cafés	10-12	Sports Halls	2-3
Garages	4 -6	Theatres	5-8
Foundaries	8-15	Spray Paint Workshops	20-50
Canteens	6-8	Meeting Rooms	5-10
Laboratories	5 -15	Workshops	6-10
Engineering	15-30	Fume Cupboards	40-50
Storage	3-6	Offices	4-8
Restaurants	6-10		

Useful tips on calculation and sizing for the correct Andrews ventilation fan

The selection of the correct fan can be achieved with the help of the following calculation:

1. Calculate the volume of the room which needs to be ventilated ($W \times L \times H$)
2. Select the recommended number of air changes per hour
3. Multiply the results of 1 by result 2, this will give the required air volume per hour

Example

An engine room which is 3 metres high x 8 metres wide x 22 metres long requires ventilation due to heat and fume build-up. From the chart we can see that the recommended air change is between 15 and 30 depending on the intensity of the application. This case is fairly intense so on the side of caution we can use the ratio of 30 changes per hour.

To calculate;

$3 \text{ m} \times 8 \text{ m} \times 22 \text{ m} = 528 \text{ m}^3 \times 30 \text{ changes} = 15,840 \text{ m}^3 \text{ per hour}$
 In this situation a model FV900 which has a capacity of 16,500 m^3 per hour would be most suitable.




Important note on using ducted units

If it is necessary to use long lengths of ducting or involve several bends in the ducting, it must be remembered that the resistance in the ducting will increase and the air volume provided will decrease drastically.

Due to high resistance, certain fans can become useless, although the stated air volume at low pressure would not indicate this at first sight. The Andrews FV fans do have high pressure capacity and can be used with several lengths of ducting.

In some applications it may be better to blow rather than suck the air out, or use a combination of the two. When used in sensitive environments or handling ignitable fumes, special precautions and equipment must be used. If the application is sensitive, complicated or long lengths of ducting need to be used, you should consult your local Andrews specialist who will be able to provide advice on all types of installations.



Air flow (max)

Power supply

Plug type

Noise level (max)

Weight

Dimensions (L x W x H)

Control

Average power consumption

4,500 m³/h

230 V 1 ph 50 Hz Run 1.9 A

BS1363 230 V

67.5 dBA @ 1 metre

12.4 kg

510 x 380 x 470 mm

Manual variable speed

440 W/h

Suitable applications include:

Office

Flood recovery

Shops

Restaurants

Hotels

Construction

Many more

👉 Plug and play



Air flow (max)

Power supply

Plug type

Noise level (max)

Weight

Dimensions (L x W x H)

Control

Power consumption

3,600 m³/h

230 or 110 V 1ph

50 Hz Run 1.15/3 A

BS1363 230 V BS4343 16 A 110 V

67.5 dBA @ 1 metre

10 kg

640 x 300 x 640 mm

Manual variable speed

265 W/h

Suitable applications include:

Offices

Gyms

Workshops

Retail


Events

Warehouses

Restaurants

Many more

👉 Plug and play



Air flow (max)

Power supply

Plug type

Noise level (max)

Weight

Dimensions (L x W x H)

Control

Power consumption

7,600 m³/h

230 or 110 V 1ph

50 Hz Run 3.7/6.1 A

BS1363 230 V BS4343 16 A 110 V

80 dBA @ 1 metre

21 kg

840 x 345 x 820 mm

Manual variable speed

851 W/h

Suitable applications include:

Offices

Gyms

Workshops

Retail



Events

Warehouses

Restaurants

Many more

👉 Plug and play



Air flow (max)

Power supply

Plug type

Noise level (max)

Weight

Dimensions (L x W x H)

Control

Power consumption

37,000 m³/h

230 or 110 V 1ph

50 Hz Run 10/21 A

BS1363 230 V BS4343 32 A 110 V

85 dBA @ 1 metre

85 kg

1,050 x 440 x 1,170 mm

Manual variable speed (230 V versions only)

2.3 kW/h

Suitable applications include:

Warehouses
Workshops
Construction
Industrial

Factories
Events
Sports
Many more

👉 Plug and play



Air flow (max)	3,900 m ³ /h
Power supply	230 V 1 ph 50 Hz Run 1.6 A
Plug type	BS1363 230 V
Duct length (max)	16 Metres (outlet only)
Duct size	300 mm
Noise level (max, with duct)	69/87 dBA/LWA @ 3 metres
Weight	16 kg
Dimensions (L x W x H)	470 x 380 x 450 mm
Control	Manual
Power consumption	368 W/h
IP Rating	IP55 (suitable for outdoor use)

Suitable applications include:

- | | |
|-----------|-------------|
| Offices | Events |
| Gyms | Warehouses |
| Workshops | Restaurants |
| Retail | Many more |

Large air flow



Air flow (max)

Power supply

Plug type

Generator size

Duct length (max)

Noise level (max, with duct)

Weight

Dimensions (L x W x H)

Control

Power consumption

1,700 m³/h

230/110 V 1 ph 50 Hz Run 5/10.5 A

BS1363 230 V BS4343 16 A 110 V

5 kVA min

16 Metres x 200 mm

78.6 dBA @ 1 metre

27 kg

605 x 440 x 535 mm

Manual

1.15 kW/h

Suitable applications include:

Construction

Tunnelling

Agricultural

Tank cleaning

Ventilation

Events

Marquees

Many more

 Large air flow

 Dual voltage



Air flow (max)

4,930 m³/h

Power supply

110 V 1 ph 50 Hz Run 17 A

Plug type

BS4343 32 A 110 V

Generator size

7 kVA min

Transformer size

5 kW min

Duct length (max)

40 metres

Duct size

300 mm

Noise level (max, with duct)

86.9 dBA @ 1 metre

Weight

130 kg

Dimensions (L x W x H)

920 x 720 x 1,045 mm

Control

Manual

Power consumption

1.8 kW/h

Suitable applications include:

Construction

Ventilation

Tunnelling

Events

Agricultural

Marquees

Tank cleaning

Many more

Large air flow



Air flow (max)

Power supply

Plug type

Generator size

Transformer size

Duct length (max)

Duct size

Noise level (max, with duct)

Weight

Dimensions (L x W x H)

Control

Power consumption

5,100 m³/h

110 V 1 ph 50 Hz Run 11.4 A

BS4343 16 A 110 V

5 kVA min

5 kW min

40 metres

300 mm

72 dBA @ 1 metre

95 kg

631 x 822 x 1,054 mm

Manual

1.25 kW/h

Suitable applications include:

Construction

Tunnelling

Agricultural

Tank cleaning

Ventilation

Events

Marquees

Many more

 Large air flow



Air flow (max)

Power supply

Plug type

Generator size

Duct length (max)

Duct size

Noise level (max, with duct)

Weight

Dimensions (L x W x H)

Control

Power consumption

12,100 m³/h

415 V 3 ph 50 Hz +E Run 6 A

BS4343 5 pin 16 A 415 V

20 kVA

40 metres

Inlet 600 mm Outlet 450 mm

83 dBA @ 1 metre

245 kg

1,115 x 1,115 x 1,350 mm

Manual

2.4 kW/h

Suitable applications include:

Construction
Tunnelling
Agricultural
Tank cleaning

Ventilation
Events
Marquees
Many more

Large air flow



Air flow (max)

Power supply

Plug type

Generator size

Duct length (max)

Duct size

Noise level (max, with duct)

Weight

Dimensions (L x W x H)

Control

Power consumption

16,500 m³/h

415 V 3 ph 50 Hz Run 10 A

BS4343 3 ph 5 pin 415 V 16 A

35 kVA

40 metres

Inlet 600 mm Outlet 450 mm

86.6 dBA @ 1 metre

295 kg

1,230 x 1,170 x 1,500 mm

Manual

6.6 kW/h

Suitable applications include:

Construction

Tunnelling

Agricultural

Tank cleaning


Ventilation

Events

Warehouses

Many more

 Large air flow

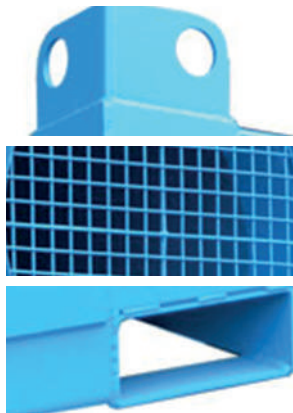

Air flow (max)
Power supply
Plug type
Generator size
Duct length (max)
Duct size
Noise level (max, with duct)
Weight
Dimensions (L x W x H)
Control
Power consumption
Inverter control

19,000 m³/h
 415 V 3 ph 50 Hz Run 11.3 A
 BS4343 3 ph 5 pin 415 V 16 A
 35 kVA
 40 metres
 Inlet 600 mm Outlet 450 mm
 74 dBA @ 1 metre
 465 kg
 1,552 x 1,152 x 1,965 mm
 Manual
 6.6 kW/h
 Optional

Suitable applications include:

Construction	Ventilation
Tunnelling	Events
Agricultural	Warehouses
Tank cleaning	Many more

Large air flow



Air flow (max)

Power supply

Plug type

Generator size

Duct length (max)

Duct size

Noise level (max, with duct)

Weight

Dimensions (L x W x H)

Control

Power consumption

38,000 m³/h

415 V 3 ph 50 Hz Run 28 A

BS4343 3 ph 5 pin 415 V 63 A

75 kVA

40 metres

Inlet 600 mm Outlet 600 mm

80 dBA @ 1 metre

1,110 kg

2,208 x 2,090 x 2,005 mm

Manual

11.6 kW/h

Suitable applications include:

Construction

Tunnelling

Agricultural

Tank cleaning

Ventilation

Events

Warehouses

Many more

 Large air flow



Electrical extension leads available in a variety of lengths and sizes complete with plug and sockets to suit different voltages and currents



Heavy duty flexible ducting available in various lengths and diameters to suit our range of extraction and ventilation units



Dust collection bags to collect airborne particles when using fans on dust extraction applications



Filter boxes can be provided on request for long term hires where dust pollution is high, or fine filtration is required



Transformers and distribution boards are available to hire in a variety of sizes, for different voltages and multiple connections

Call us on **0800 211 611** if you require specialist filtration systems. We often provide tailored solutions to meet specific requirements.


Far from still being regarded a non-essential, air quality control equipment is now a highly sought-after provision due to a sharp upturn in businesses proactively searching for ways to create a safe environment for staff, customers or visitors.

With demand only increasing, Andrews Sykes has taken the initiative and introduced a range of units specifically designed to remove pollutants from the atmosphere.

Air Purifiers

Our air purifiers will extract harmful contaminants and particles from the air by trapping and neutralising them inside a built-in reactor chamber.

Featuring core technology that has been specifically tested against ozone release, hazardous gases and VOCs, our units ensure the inactivation of potentially dangerous bacteria and simultaneously reduce the likelihood of viruses being transmitted between people.

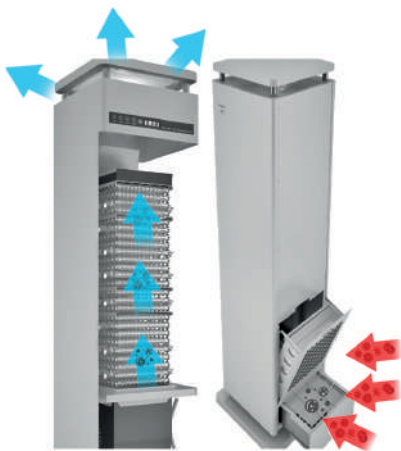

Air Cleaners

These units are intended for more industrial applications although the concept behind their deployment is very similar to that of an air purifier.

Intended for use inside factories, warehouses or even healthcare facilities, our air cleaners incorporate a HEPA 14 filtration system which traps toxins and particles as small as 0.1 microns.

Their compact design enables the units to be easily relocated whenever necessary, offering a flexible yet robust air quality control solution suited to a broad spectrum of environments.





Air flow (max)
Typical area coverage
Power supply
Plug type
Noise level (max)
Weight
Dimensions (L x W x H)
Pre-filter
Main filter
TiO2 Hexagon grade of filter
UV Purification
Control
Average power consumption
filter lifespan

609 m³/h
 100 m²
 230 V 1 ph 50 Hz Run 1.2 A
 BS1363 230 V 13 A
 49 dBA / 54 LWA @ 1 metre
 38kg
 320 x 320 x 1,570mm
 G4 Pre-filter
 2 x HEPA 13 filters
 70
 8 cells plus activated carbon filter
 Digital
 210 W/h
 6000 hours
 25 months @ 8 hours a day

Suitable applications include:

Hospitals	Hotels
Offices	Leisure Centre
Schools	Events
Restaurants	Many more

✦ H13 Hepa filters



Air flow (max)

Typical area coverage

Power supply

Plug type

Noise level (max)

Weight

Dimensions (L x W x H)

Negative Ions generated

UV purification

Control

Average power consumption

Reactor / filter lifespan

720 m³/h

130 m²

230 V 1 ph 50 Hz Run 1.3 A

BS1363 230 V 13 A

45 dBA / 50 LWA @ 1 metre

13.5 kg

430 x 127 x 1,021 mm

24 million per second

4 cells plus activated carbon

Wifi enabled

224 W/h

1,500 hours (alarm)

6 months @ 8 hours per day

Suitable applications include:

Hospitals

Offices

Schools

Restaurants


Hotels

Leisure Centre

Events

Many more

🌀 H13 Hepa filters



Air flow (max)

Typical area coverage

Power supply

Plug type

Noise level (max)

Weight

Dimensions (L x W x H)

Filters

Control

Power consumption

Operating temperature

Duct length (max)

Duct size

1600 m³/h

150 m²

230 V 1 ph 50 Hz Run 1.1 A

BS1363 230 V 13 A

60 dBA / 75 LWA @ 10 metres

24 kg

390 x 580 x 420 mm

G4 Pre filter & HEPA

14 Hours run counter

253 W/h

1 - 34°C

Total 16 metres

200 mm

Suitable applications include:

Offices

Hospitals

Schools

Hotels

Restaurants


Healthcare

Gyms

Many more

 Hepa filtration

 Plug and play



Duty Rated 30% rh. 21°C
Air flow (max)
Power supply
Noise level
Weight
Dimensions (L x W x H)
Reservoir capacity
Average Power consumption
Control

2.5 l/h
 800 m³/h
 230 V 1 ph 50 Hz Run 0.23 A
 29 dBA @ 1 metres
 18.8 kg empty 52.8 kg full
 625 x 316 x 720 mm
 34 litres
 53 W/h
 Integral humidistat

Suitable applications include:

- | | |
|-----------|---------------|
| Offices | Museums |
| Hospitals | Art Galleries |
| Schools | Server rooms |
| Hotels | Many more |

👉 Plug and play



Duty Rated 20% rh. 25°C
Air flow (max)
Power supply
Noise level
Weight
Dimensions (L x W x H)
Reservoir capacity
Average power consumption
Control

1.8 l/h
500 m³/h
230 V 1 ph 50 Hz Run 0.65 A
57 dBA @ 3 metres
11 kg
550 x 345 x 610 mm
19.5 litres
150 W/h
Integral humidistat

Suitable applications include:

Offices	Museums
Hospitals	Art Galleries
Schools	Server rooms
Hotels	Many more

👉 Plug and play



Duty Rated 20% rh. 25°C
Air flow (max)
Power supply
Noise level
Weight
Dimensions (L x W x H)
Reservoir capacity
Average power consumption

4.2 l/h
 1000 m³/h
 230 V 1 ph 50 Hz Run 0.9 A
 44 dBA @ 3 metres
 24 kg
 755 x 365 x 620 mm
 50 litres
 150 W/h

Suitable applications include:

Offices	Museums
Hospitals	Art Galleries
Schools	Server rooms
Hotels	Many more

👉 Plug and play

Helping you deal with low humidity in modern environments.

It is widely advised that relative humidity (RH) in the workplace, or indeed most environments, should be maintained between 40-60%. The need to keep indoor air at an optimal moisture level is now globally accepted, with extensive health implications of overtly dry air.



Ranging from sore throats and eye irritations to dermatitis and respiratory conditions, the effects of inadequate humidity monitoring can leave people under your direct care exposed to avoidable ailments.

It is also now known that RH levels kept in the recommended parameters will help minimise the risk of virus transmission within the workplace, reducing the time contagious viruses are airborne.

As experts in the provision of temporary humidification solutions, we have an authoritative voice on how best to tackle whichever humidity-related requirements you might encounter.

Offices

The modern-day office facility is usually a sealed environment which relies heavily on HVAC systems for heating and cooling. The lack of natural ventilation which make these systems extremely efficient has a negative effect when trying to maintain a stable RH. Our small portable humidifiers are easy to position and with their discrete design, easily blend into most office environments to instil a more comfortable and safer environment for staff.

Machinery

Although people are most commonly considered, the impact that low RH may have on machinery and electrical equipment should also not be overlooked. There are many scenarios in which low moisture content in the air can cause damage, affect productivity, or otherwise inhibit your business or process.



Industries such as commercial printers are more than aware of the consequences of not maintaining a suitable RH level, when properly addressed good humidity levels can directly contribute to less downtime. This is due to the assurance of fewer paper jams and less paper sticking together, among other reasons. With proper humidity control, the quality of printing improves too as it helps get rid of paper distortion and prevents static electricity from causing further issues.

Art galleries & Museums


Fine art and artifacts may perish when humidity levels are too low. Our portable humidifiers are regularly rented by art galleries and museums to stop priceless masterpieces cracking and ensure the preservation of significant historical items.

Andrews' range of portable humidifiers are used in a multitude of applications. In addition to the above sectors, our equipment is used in:

- Document storage
- Film & TV
- Hospitals & healthcare
- Hotels & Hospitality
- Laboratories
- Server rooms & data centres
- Facilities management.



For more information, please call our expert team on 0800 211 611 or visit our website where you can read more about our humidification services. Alternatively, you can watch our short informative video: www.andrews-sykes.com/humidifier-hire/

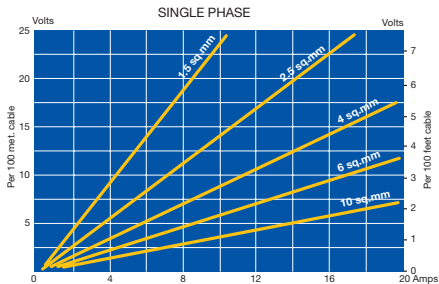

Standard electrical supplies in the UK

110 volt single phase (110/1/50) standard voltage found on construction sites for small tools and portable appliances usually only available up to 32 amp.

415 volt three phase (415/3/50) standard voltage on site and within industry for the larger equipment that is not portable.


240 volt single phase (240/1/50) standard domestic voltage used for household appliances, retail and light industrial.

Power = kilowatts (kW)

Current = Amps (A)

Voltage = Volts (V)

	Single Phase	Three Phase
kW =	$\frac{\text{Volts} \times \text{Amps} \times \text{Eff \%}}{1000 \times 100}$	$\frac{\text{Volts} \times \text{Amps} \times \text{Eff \%} \times \text{PF} \times 1.73}{1000 \times 100}$

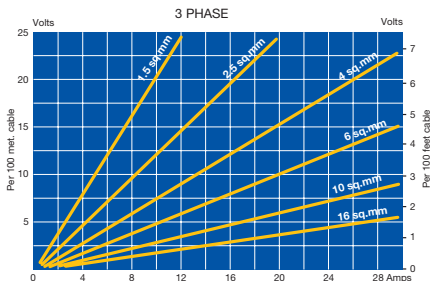

Voltage drop

The amount of voltage lost when using long cable lengths, causes cable to get hot and become unsafe. The motor will also draw excessive current causing overloads to trip and motor to overheat the maximum permissible voltage drop over a length of cable is 2.5%.

To calculate volt drop use table on page 79 or use the following calculation, based on copper cable.

$$\text{Voltage drop} = \frac{\text{Length of cable (m)} \times 0.018 \text{ (resist)} \times \text{Amps} \times 1.73}{\text{Cross sectional area of cable (mm}^2\text{)}}$$

The above will give the voltage lost in cable length (v) divide by the supply voltage will give the % drop which must not exceed 2.5%

Example

16 Amp 3 phase 415 volt pump using 60 metres of 2.5mm cable

$$\frac{60 \times 0.018 \times 16 \times 1.73}{2.5\text{mm}^2} = 11.96$$

11.96 volt / 415 volt = 2.8% Therefore a larger cable is required as the volt drop exceeds 2.5%

Inches	x	25.4	=	mm	x	0.0394	=	Inches
Feet	x	0.3048	=	m	x	3.281	=	Feet
Yards	x	0.9144	=	m	x	1.0936	=	Yards
Miles	x	1.609	=	km	x	0.6214	=	Miles
Ft ²	x	0.0929	=	m ²	x	10.764	=	Ft ²
Miles ²	x	2.59	=	km ²	x	0.3861	=	Miles ²
In ³	x	16387	=	mm ³	x	0.000061	=	In ³
Ft ³	x	0.02832	=	m ³	x	35.31	=	Ft ³
Gals (Imp)	x	4.546	=	L	x	0.22	=	Gals (Imp)
Gals (Imp)	x	0.004546	=	m ³	x	220	=	Gals (Imp)
btu	x	0.000293	=	kW	x	3412	=	btu
LBS	x	0.4536	=	kg	x	2.2046	=	LBS
Tons	x	1016	=	kg	x	0.000984	=	Tons
CFM	x	1.701	=	m ³ / h	x	0.5878	=	CFM
L / sec	x	3.6	=	m ³ / h	x	0.277	=	L / sec
PSI	x	0.06895	=	Bar	x	14.504	=	PSI
HP	x	0.7457	=	kW	x	1.341	=	HP

MAXIMUM 23°C


Recommended by Chartered Institute of Building
Services Engineers

**CALL ANDREWS AIR CONDITIONING
HIRE**

MINIMUM 16°C

Legal minimum Health & Safety Executive
Act of 1963

**CALL ANDREWS HEAT FOR
HIRE**

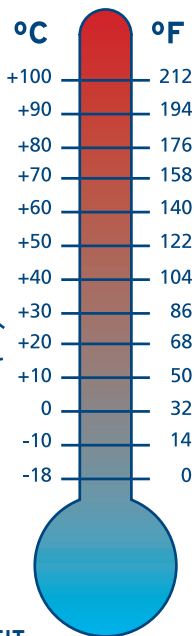**CONVERSION CENTIGRADE TO FAHRENHEIT**

$$^{\circ}\text{C} \times 1.8 + 32 = ^{\circ}\text{F}$$

$$^{\circ}\text{F} - 32 \div 1.8 = ^{\circ}\text{C}$$

R.H.

Relative Humidity is the relationship between the amount of water vapour in air at any temperature and the maximum amount of water vapour which the air could absorb before condensation takes place. Relative humidity is expressed as a percentage.

Dew Point

The temperature at which water vapour in the air condenses out.

Vapour pressure

The partial pressure in the air due to the presence of water.

Condensation

When humid air cools, the water vapour becomes liquid.

Cold Bridge

An area of physical contact between a warm and cold surface where condensation occurs.

Surface area

$$L \times B = m^2$$

Volume

$$L \times B \times H = m^3$$

Latent Heat

The heat required to evaporate or condense water with no change in temperature.

K-factor

Heat transmission coefficient.

Wet Bulb Temperature

Temperature of humid air with a thermometer with a wet covering around the mercury reservoir, at an air speed of +/3 m/sec.

Dry Bulb Temperature

Temperature of humid air, measured with a normal thermometer.

Absolute Humidity

Amount of water vapour, expressed in kg, which is present per kg. of dry air.

Psychrometric Diagram

A diagram in which a relation is given between the absolute and relative humidity at a specified pressure for each temperature.

Pressure

Force per surface unit (n/m^2 - PA).



The past, present and future of pumping in the UK.

Established for over 160 years, Sykes is the UK's largest specialist hire company. Solutions focused, our industry experienced teams provide 24/7 planned and preventative pumping and specialist fluid moving, via a network of nationwide locations. Our unique structure enables us to reach any UK destination within four hours and our commitment to delivering the finest equipment, service and expertise is unrivalled within the industry.

Businesses rely on us whether safeguarding against equipment failure, which can have a detrimental impact on people and service, or providing the right conditions to ensure maximum productivity.

From straightforward hire services to full solution provision including design, planning, project management, installation and running of complex temporary and permanent solutions. We can provide an extensive range of diesel, electric, submersible, hydraulic and air pumps to withstand the toughest applications and the most demanding environments.

With an impressive and varied client portfolio, our ability to provide a competitive and engineered solution for every pumping requirement, coupled with bespoke, flexible contract terms to suit, provides ultimate peace of mind and makes us the preferred choice when it comes to business critical equipment hire.



The Andrews Sykes name stretches far beyond the UK.

In Europe, Andrews Sykes continues to grow. Since opening our first mainland Europe depot in Holland over 40 years ago, we now have depots throughout France, Belgium, Luxembourg, Switzerland and Italy, with partnerships in both the Republic of Ireland and Northern Ireland.

We have been established in the Middle East for over 40 years. Our Khansaheb Sykes subsidiary is a market leader for dewatering and pump hire throughout the Middle East as well as our younger cooling and ventilation division - Andrews Sykes Climate Rental which is growing rapidly. We operate from Dubai, Sharjah, Abu Dhabi, Oman, Saudi Arabia, Bahrain, Qatar and Kuwait. Since the early days, when we were first involved in the Dubai Creek crossings, right up until recent times, we have been heavily involved in many of the major development projects throughout the GCC.

The Andrews Sykes brand is well known worldwide. In North America, we work with distributors, for both sales and hire. Recently we have provided equipment for major projects in Russia, Asia, Africa and South America. No matter your location or whereabouts, Andrews Sykes can offer safe, reliable and efficient hire solution for many applications.

For further information on our worldwide locations, visit our website:
www.andrews-sykes.com/world-locations

Nationwide Depot Network

Aberdeen	London (Charlton)
Ashford	Milton Keynes
Basildon	Norwich
Birmingham	Nottingham
Bovey Tracey	Oldham
Bristol	Penrith
Doncaster	Peterborough
Glasgow	Pontypridd
Grangemouth	Portsmouth
Heathrow	Sedgefield
Inverness	Stoke on Trent
Liverpool	West Sussex

We also have operations in
Europe and the Middle East



Registered office: St David's Court,
Union Street, Wolverhampton, WV1 3JE
Tel: 01902 328 700
Email: info@andrews-sykes.com
Web: andrews-sykes.com

HIRE SALES SERVICE INSTALL

0800 211 611

andrews-sykes.com